

**Rittal  
Technische  
Dokumentation  
TS 8**

**Rittal  
Technical  
documentation  
TS 8**

**Montage-  
Anleitung TS 8**

**Assembly  
guide TS 8**


„FOR USE ONLY IN EQUIPMENT WHERE THE  
USE OF THE COMPONENT IS SPECIFIED“




# Inhaltsverzeichnis

## Table of contents




|                                         |                                   | Seite/Page |
|-----------------------------------------|-----------------------------------|------------|
| Dach                                    | Roof                              | 3          |
| Boden                                   | Base                              | 4-5        |
| Rückwand                                | Rear wall                         | 6          |
| Tür                                     | Door                              | 7          |
| Tür, 180° drehen                        | Rotate door through 180°          | 8          |
| Tür, 180°-Scharnier                     | Door, 180° hinge                  | 9          |
| Verschlußsystem                         | Lock system                       | 10         |
| Seitenwände                             | Side panels                       | 11         |
| Montageplatte, versetzen                | Mounting plate, relocate          | 12         |
| Montageplatte, hinterste Einbauposition | Mounting plate, rearmost position | 13         |
| Montageplatten Zwischenstück            | Mounting plate infill             | 14         |
| Anreihen                                | Bay                               | 15-17      |
| Erdungskonzept                          | Earthing concept                  | 18         |
| Schienensysteme                         | Rail systems                      | 19-20      |
| Transport                               | Transport                         | 21         |

|                                                     |                                                 |               |
|-----------------------------------------------------|-------------------------------------------------|---------------|
| Weitere Dokumentationen/Software:                   | Further documentations/Software:                | www.rittal.de |
| - Belastungsbroschüre TS 8                          | - Load indications TS 8                         |               |
| - RI Therm SK 3121.000                              | - RI Therm SK 3121.000                          |               |
| - Schutzleiteranschluß/Strombelastbarkeitsbroschüre | - Earthing connection/Current carrying capacity |               |

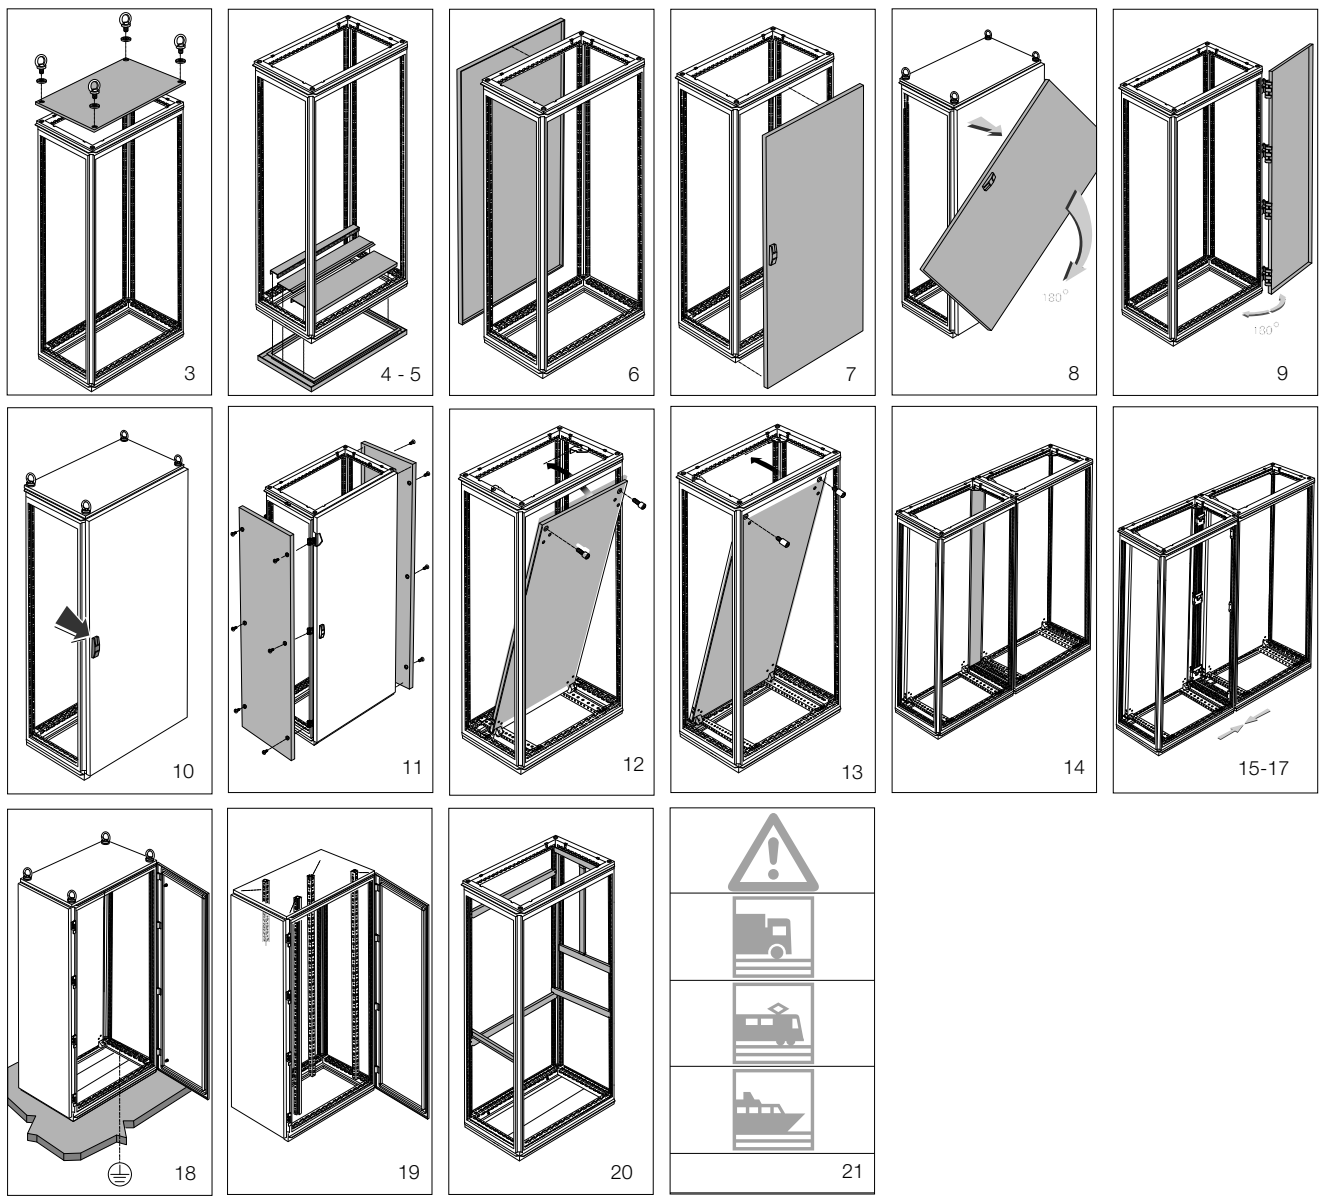


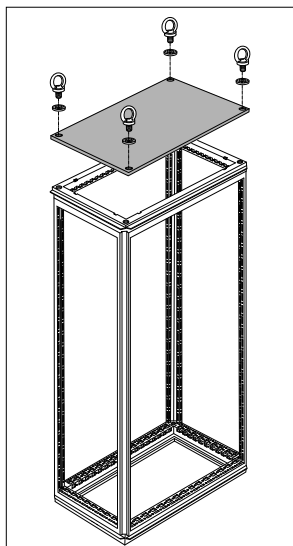







$M_D$  (min) = 10 Nm  
 $M_D$  (max) = 35 Nm

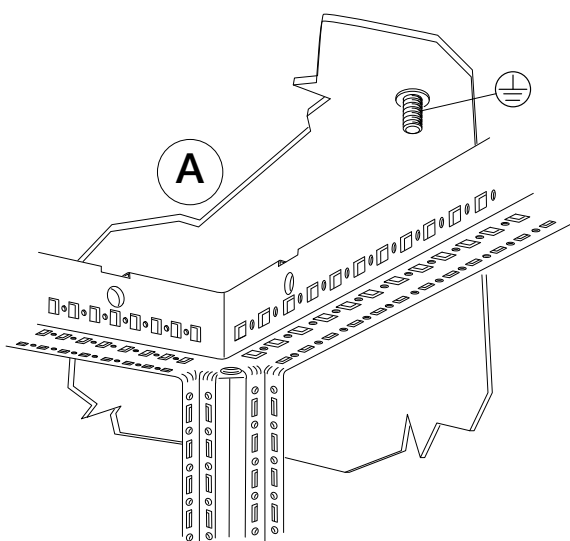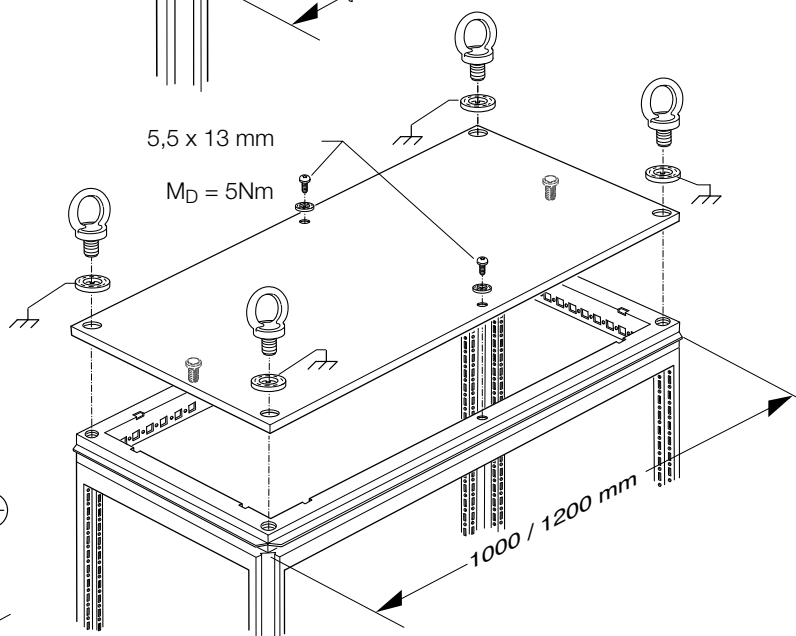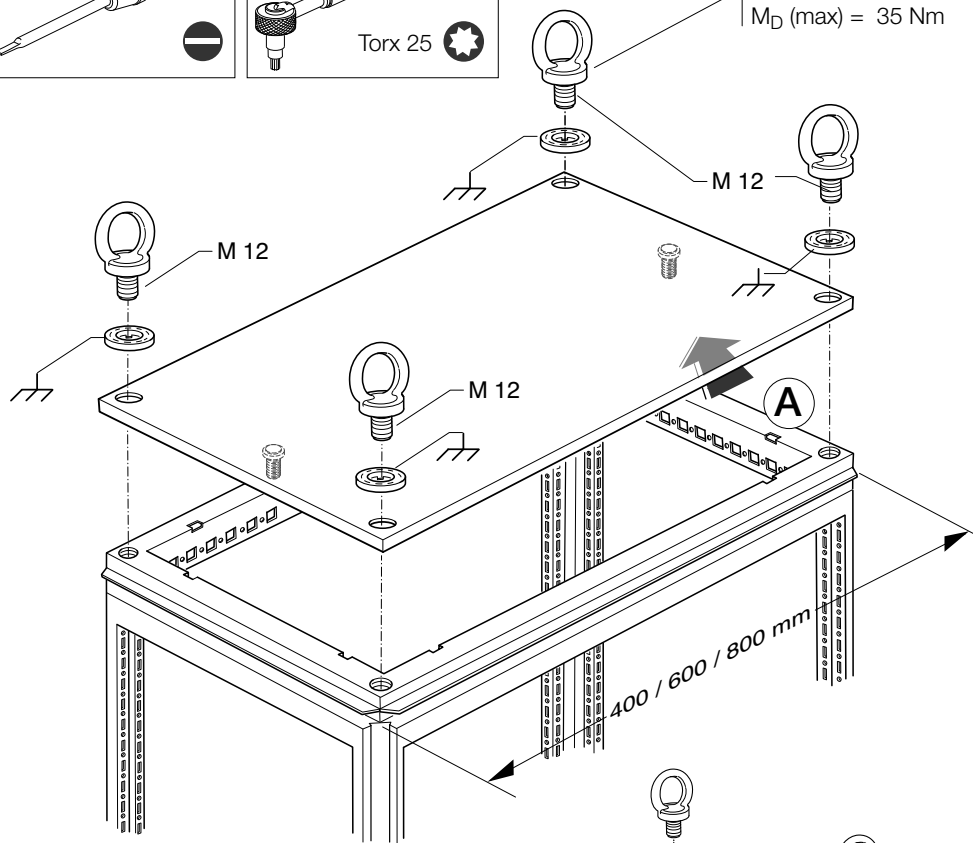


Dach · Roof



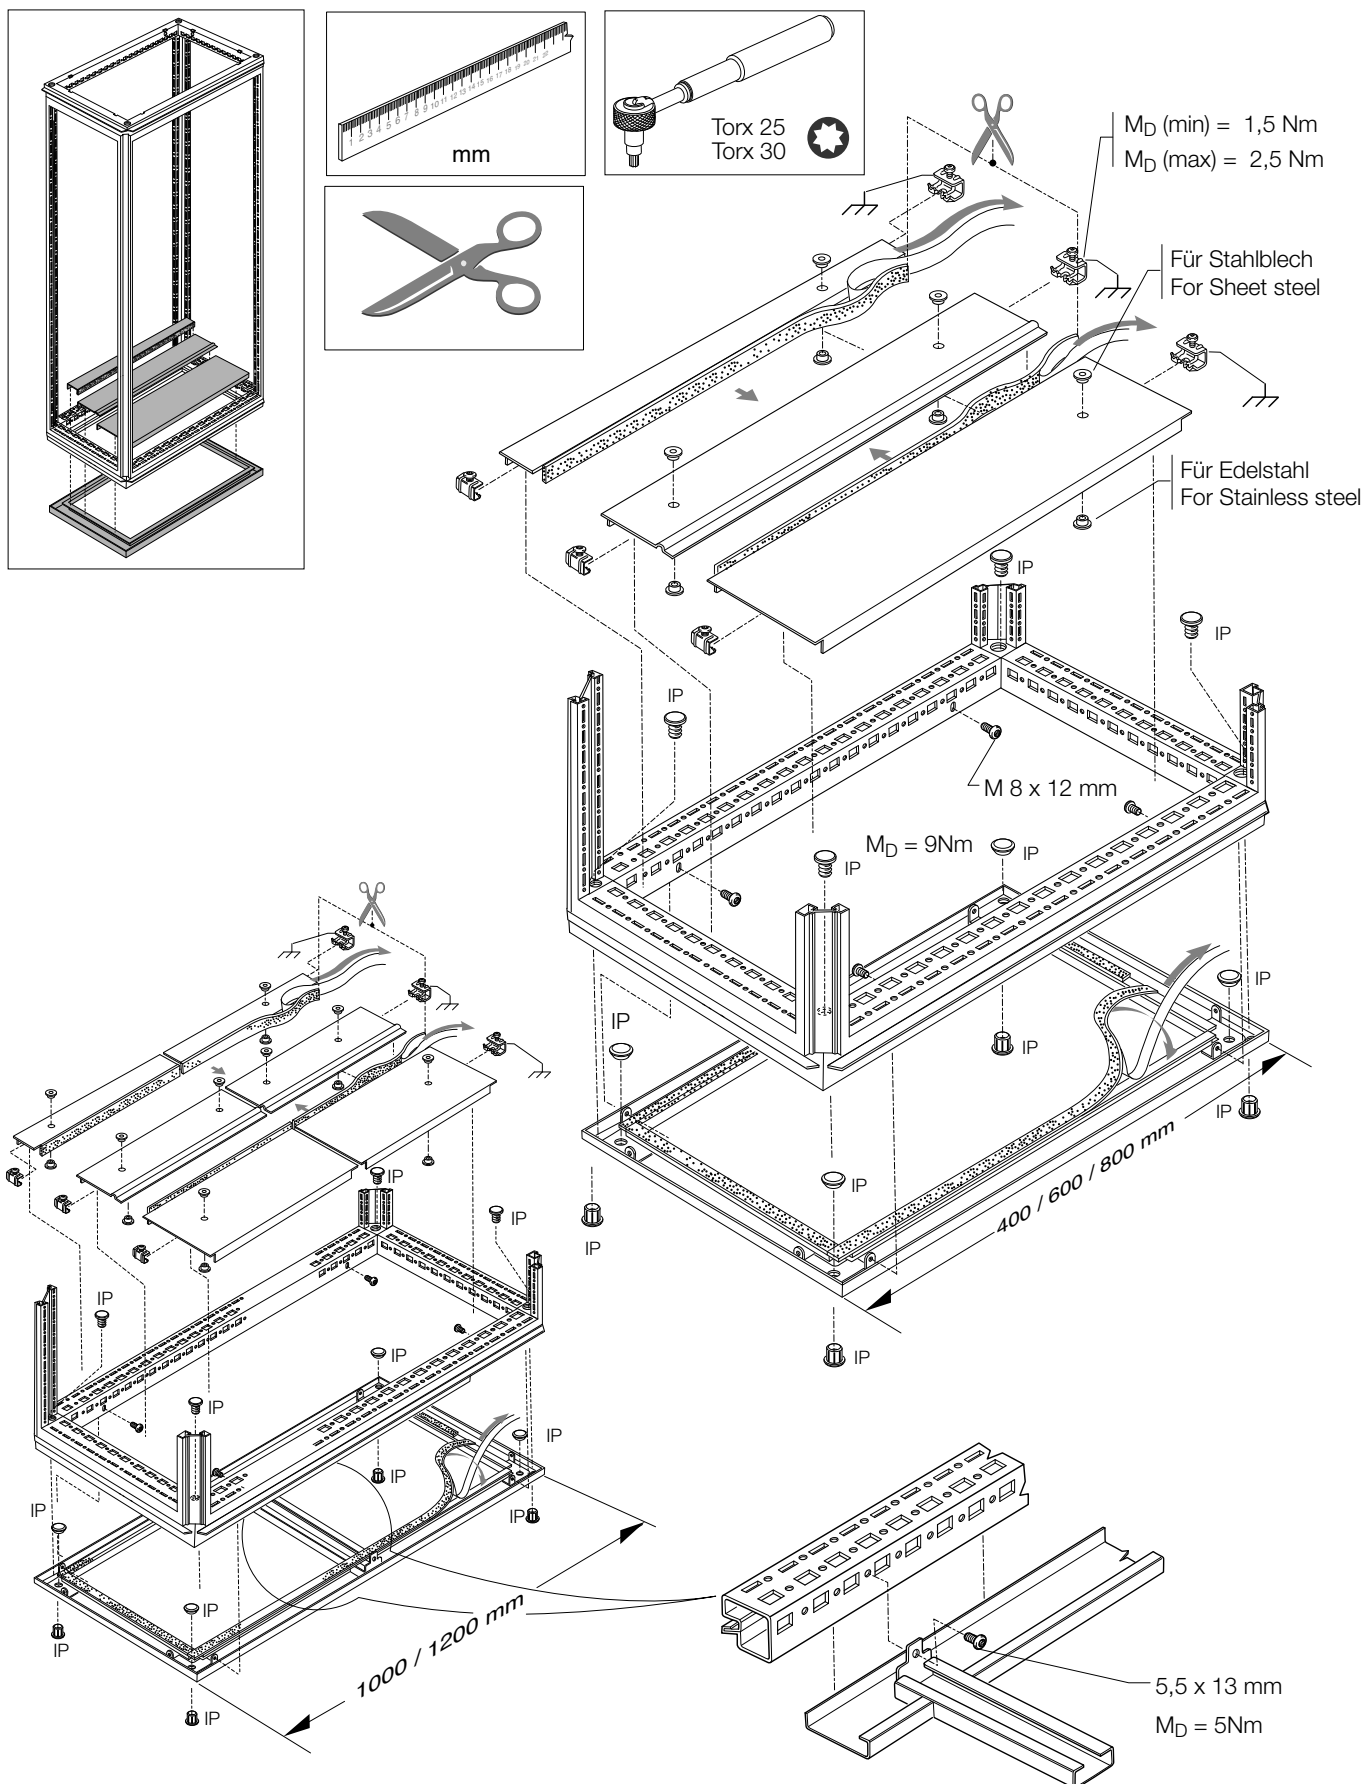


Boden · Base

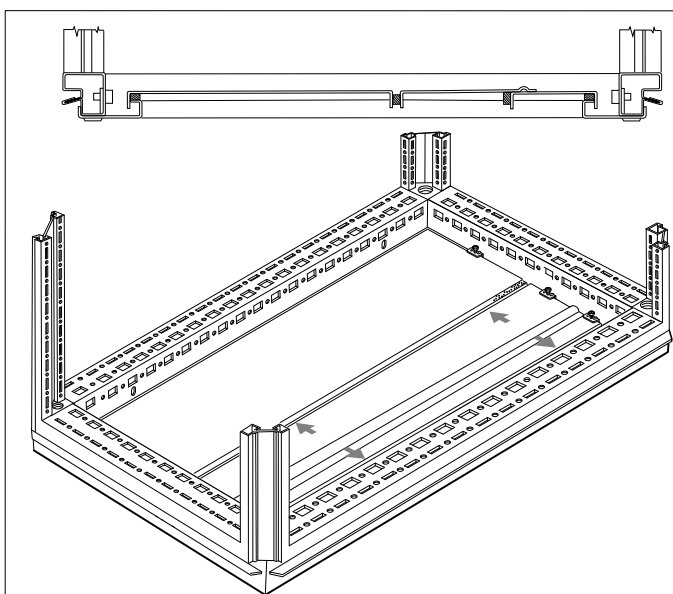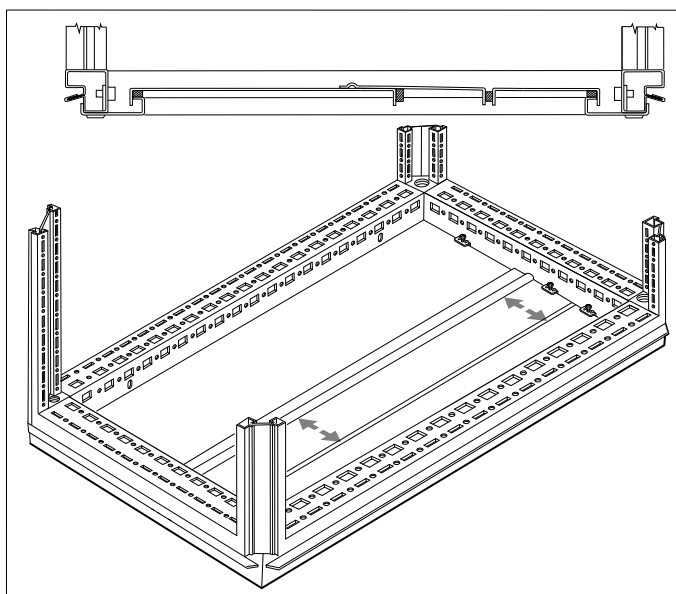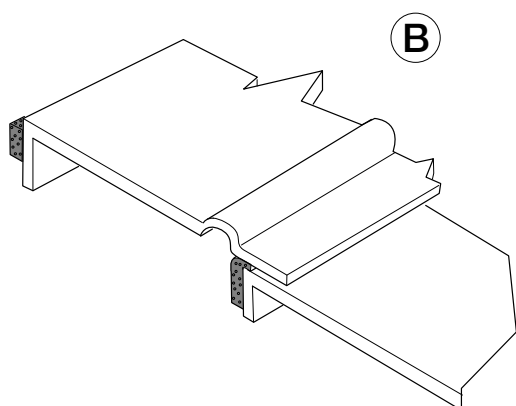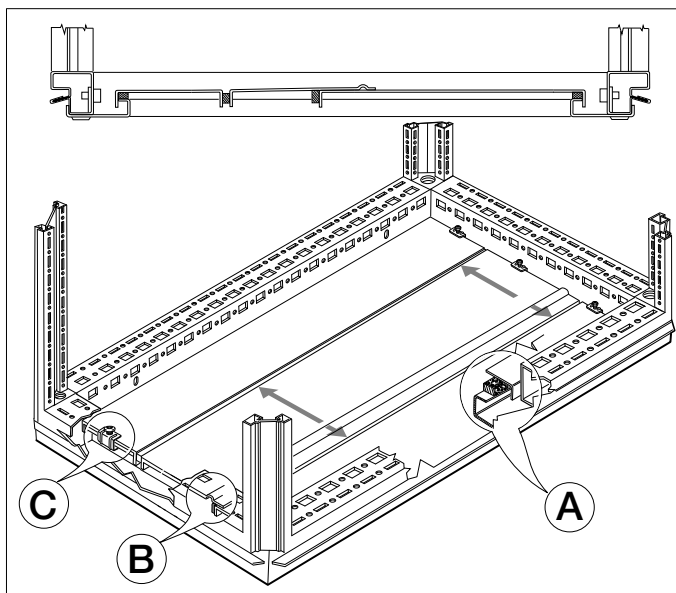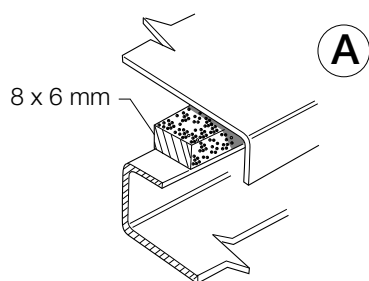

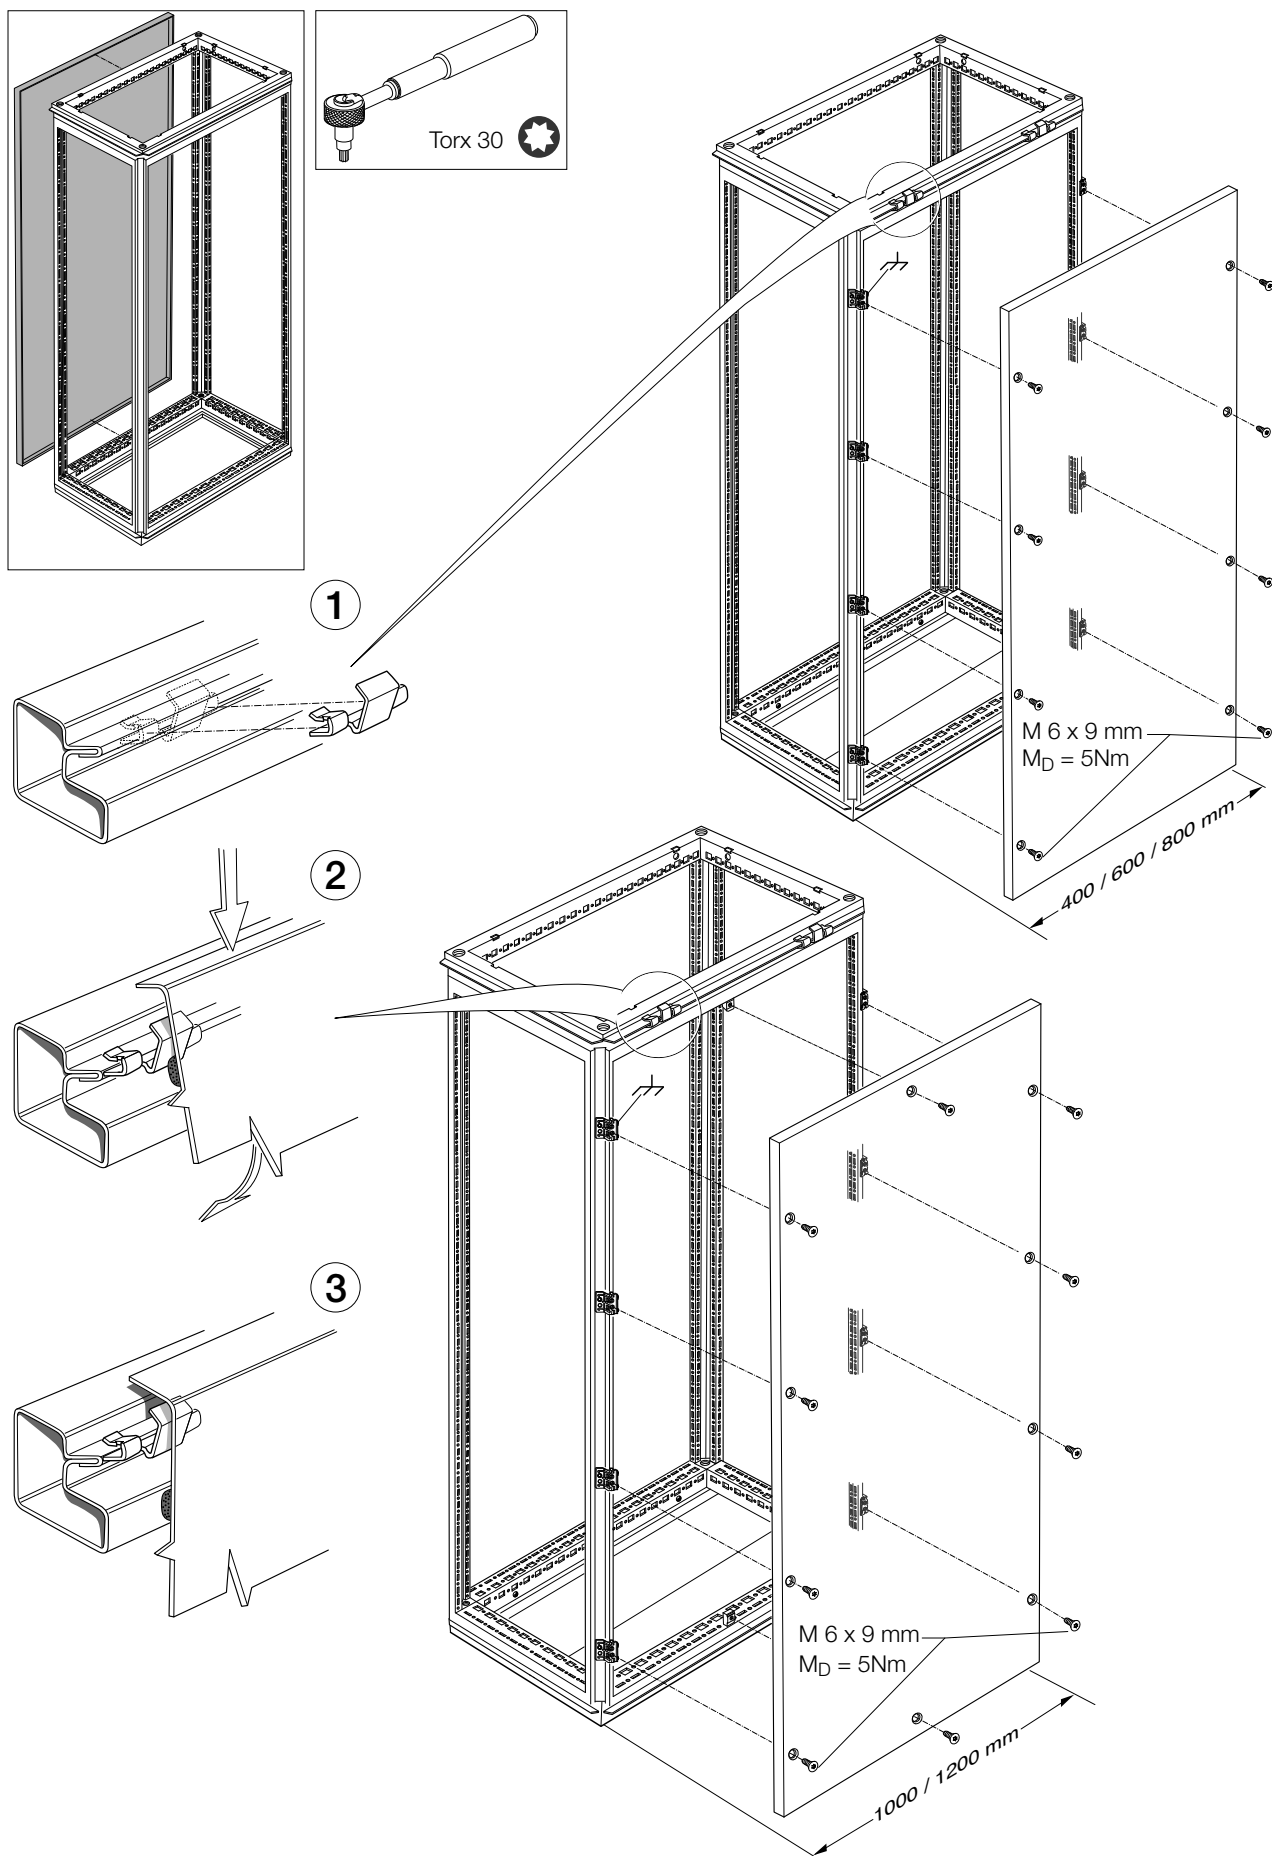


Rückwand · Rear wall

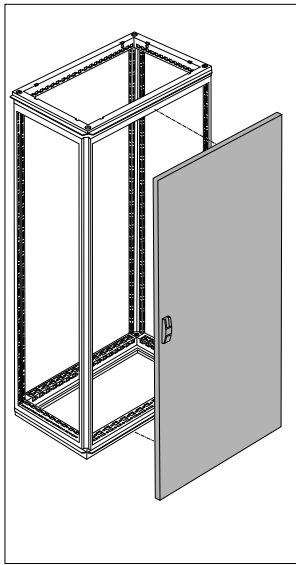

SW 13

Torx 30

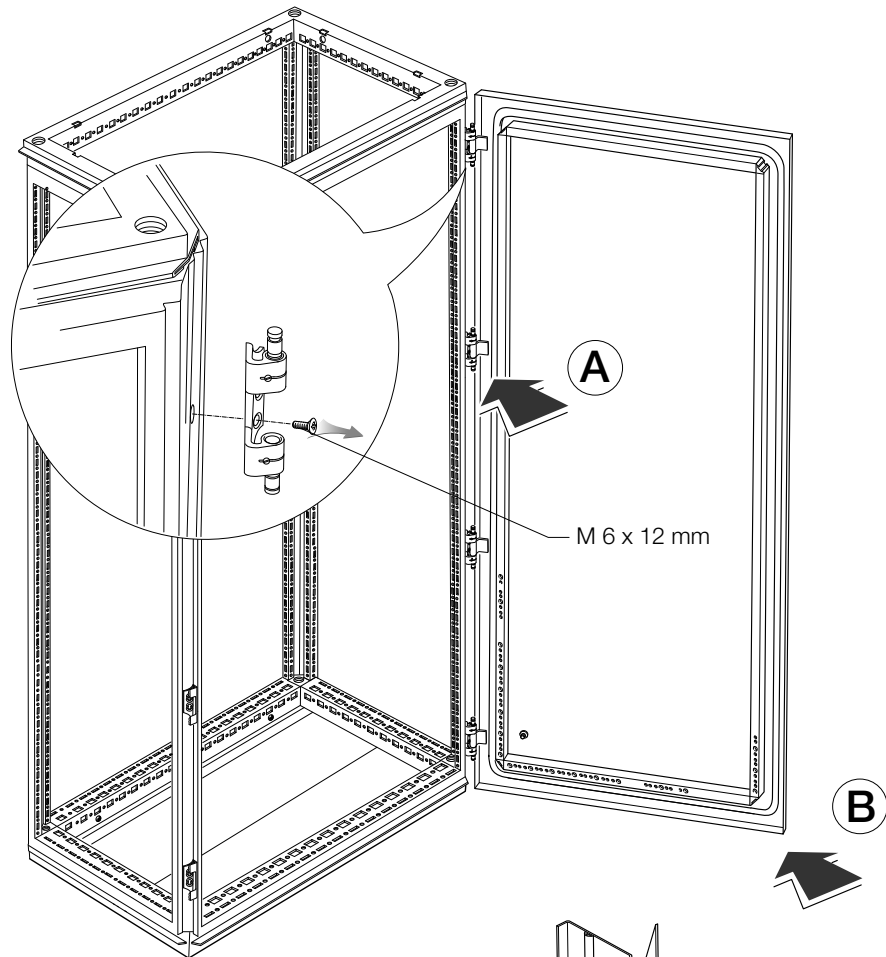


A


M 6 x 12 mm

B

A





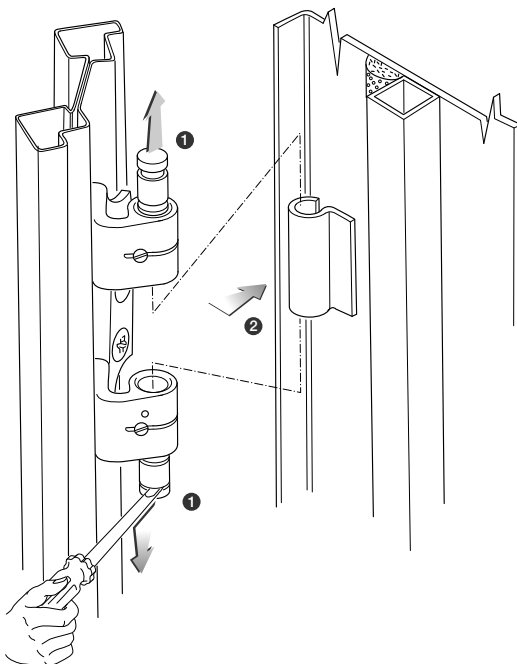


B

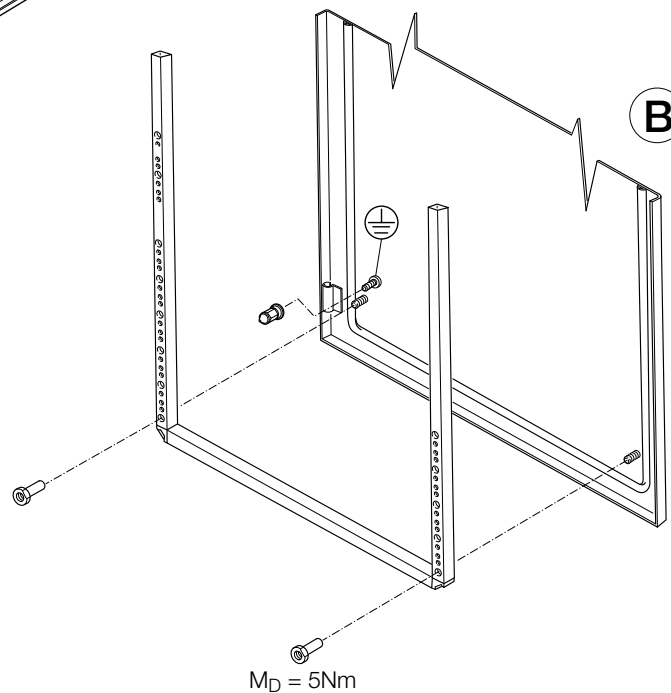


$M_D = 5Nm$


Tür · Door

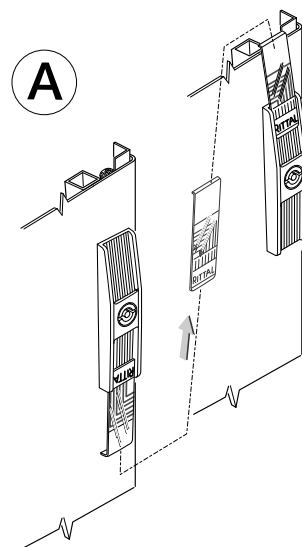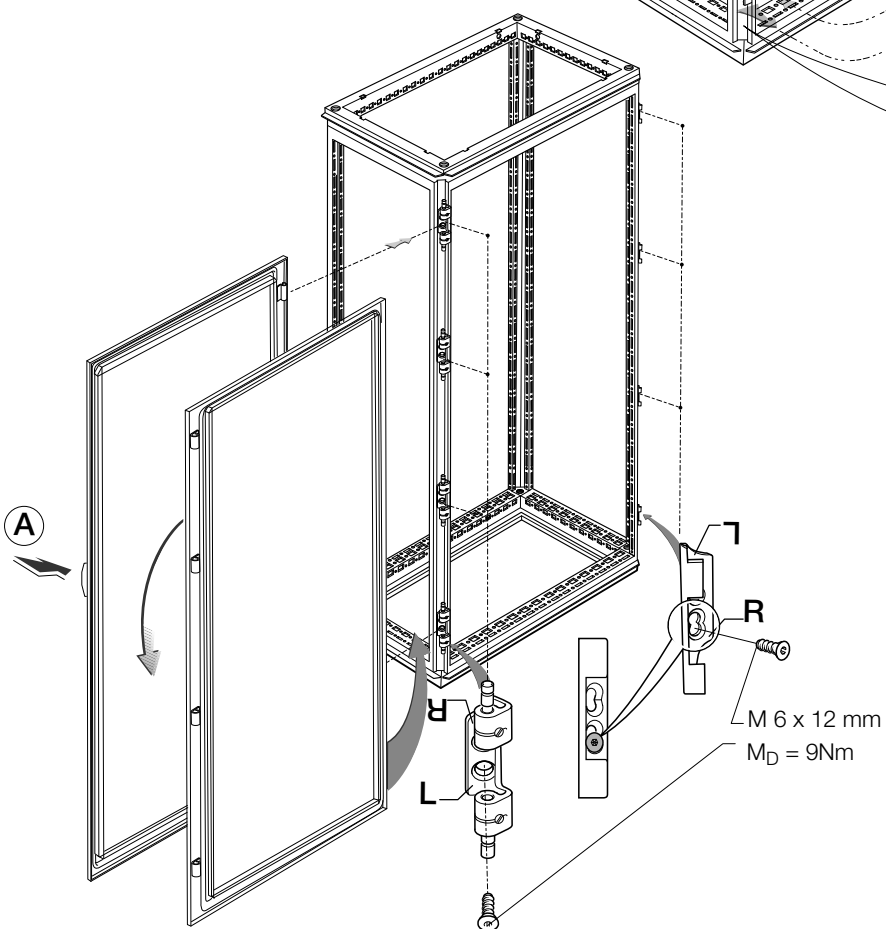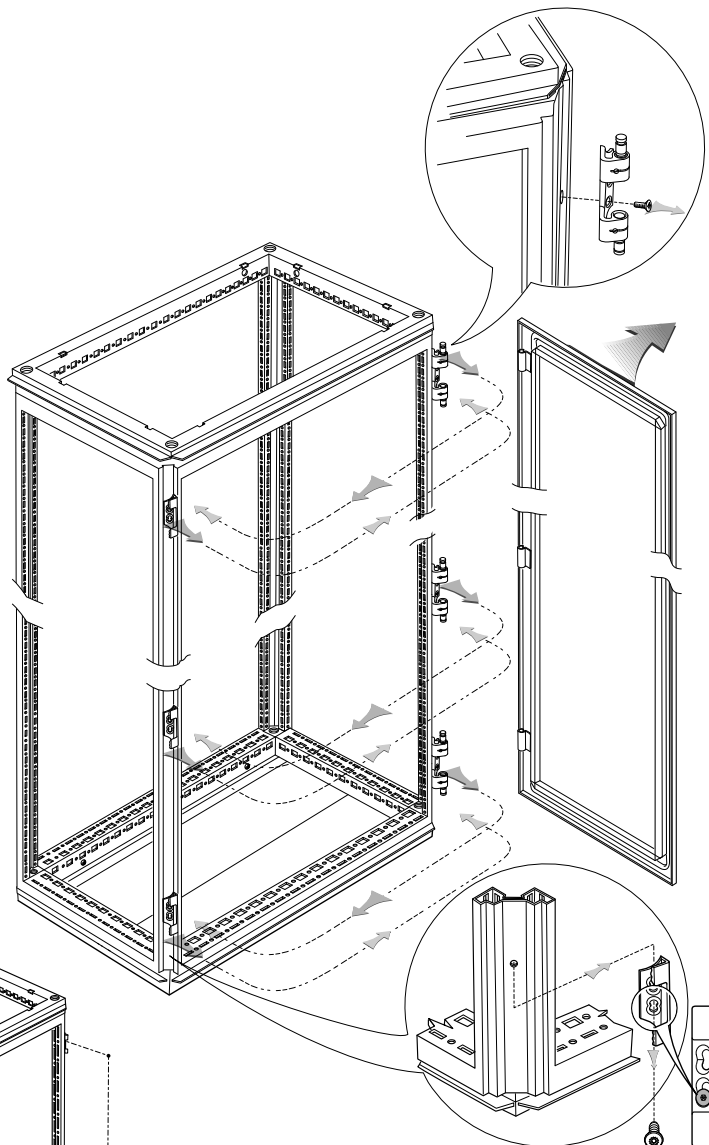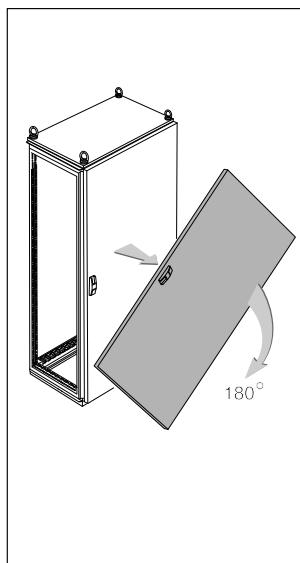







Tür, 180° drehen · Rotate door through 180°

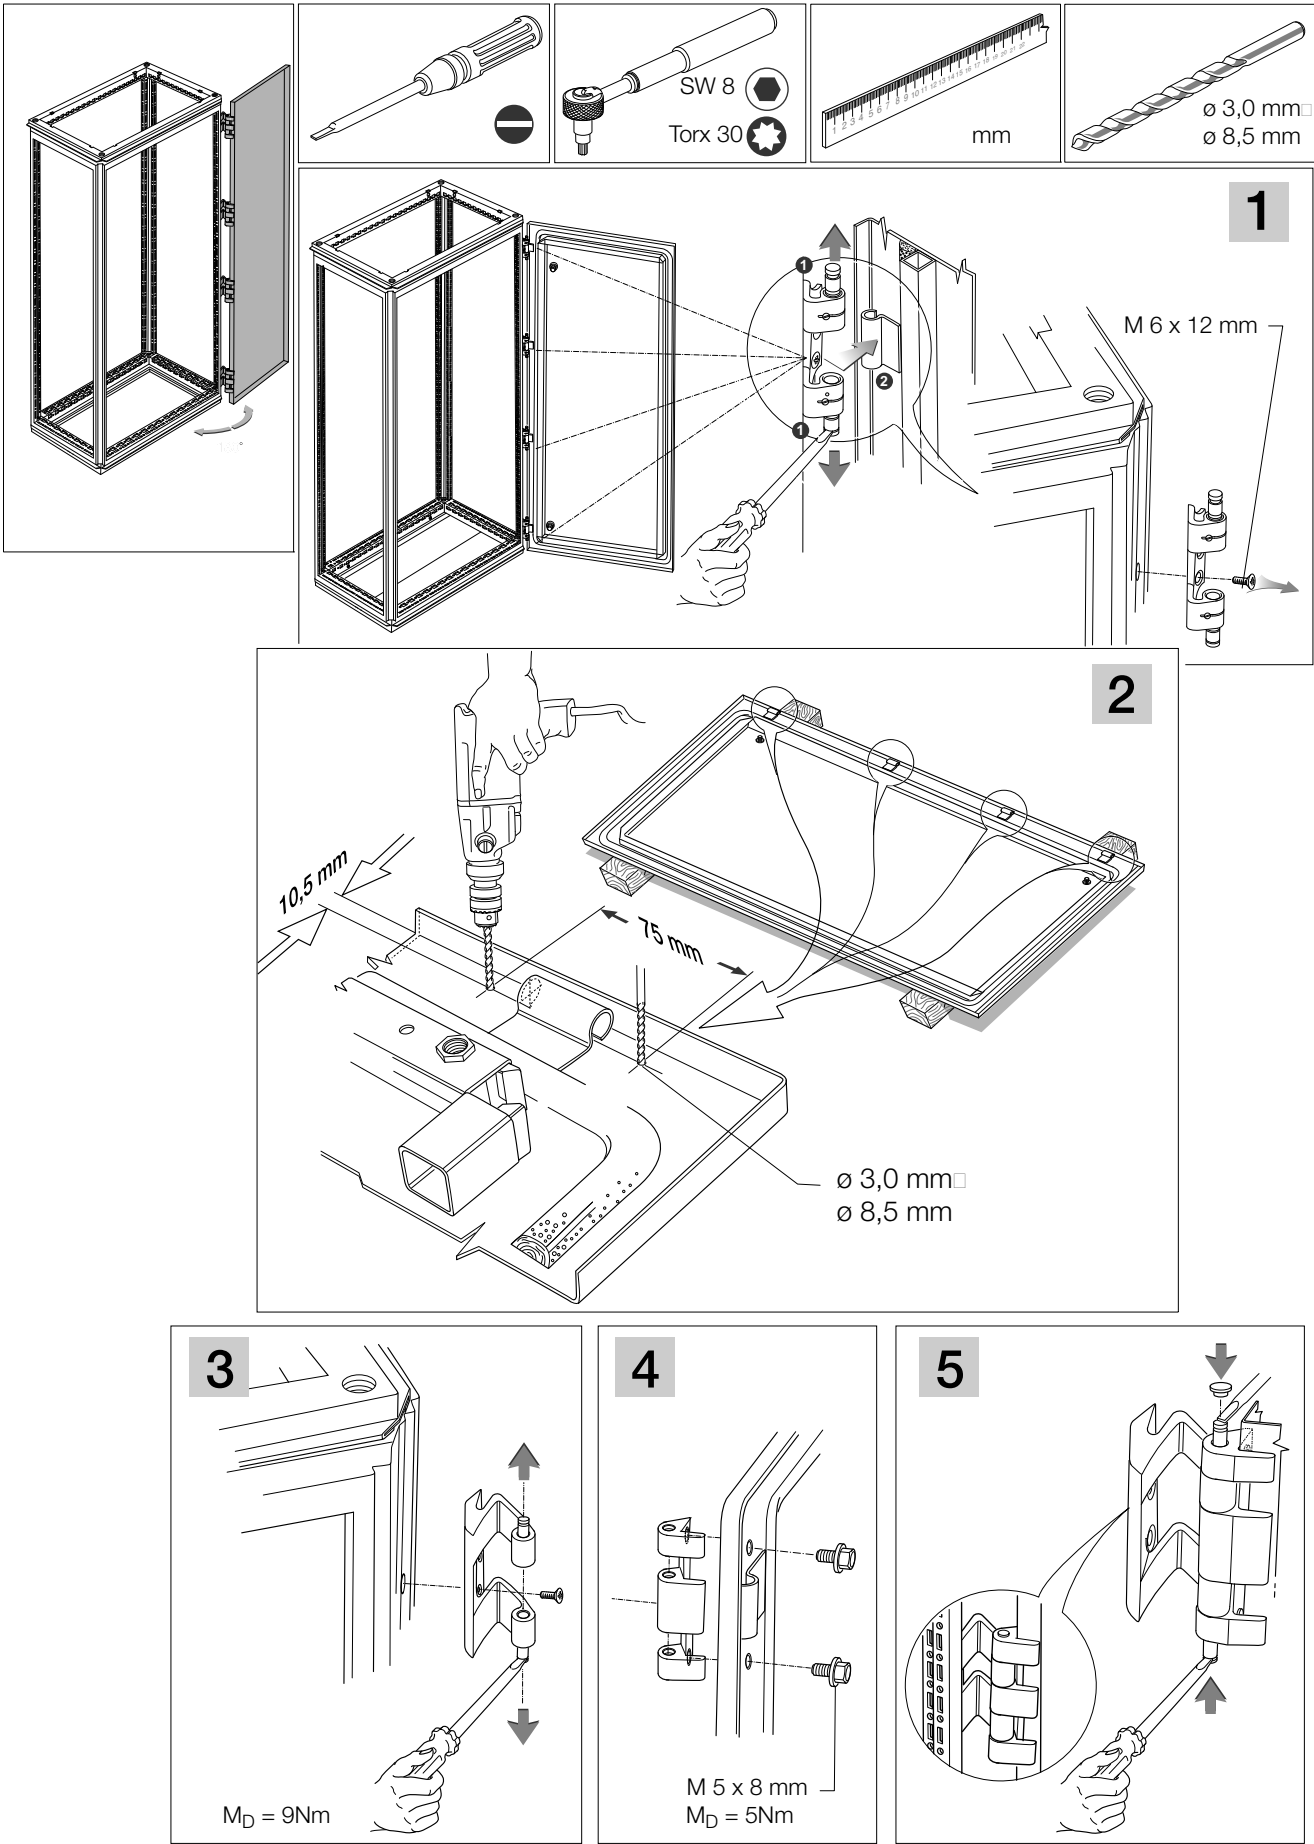


Tür, 180°-Scharnier · Door, 180° hinge








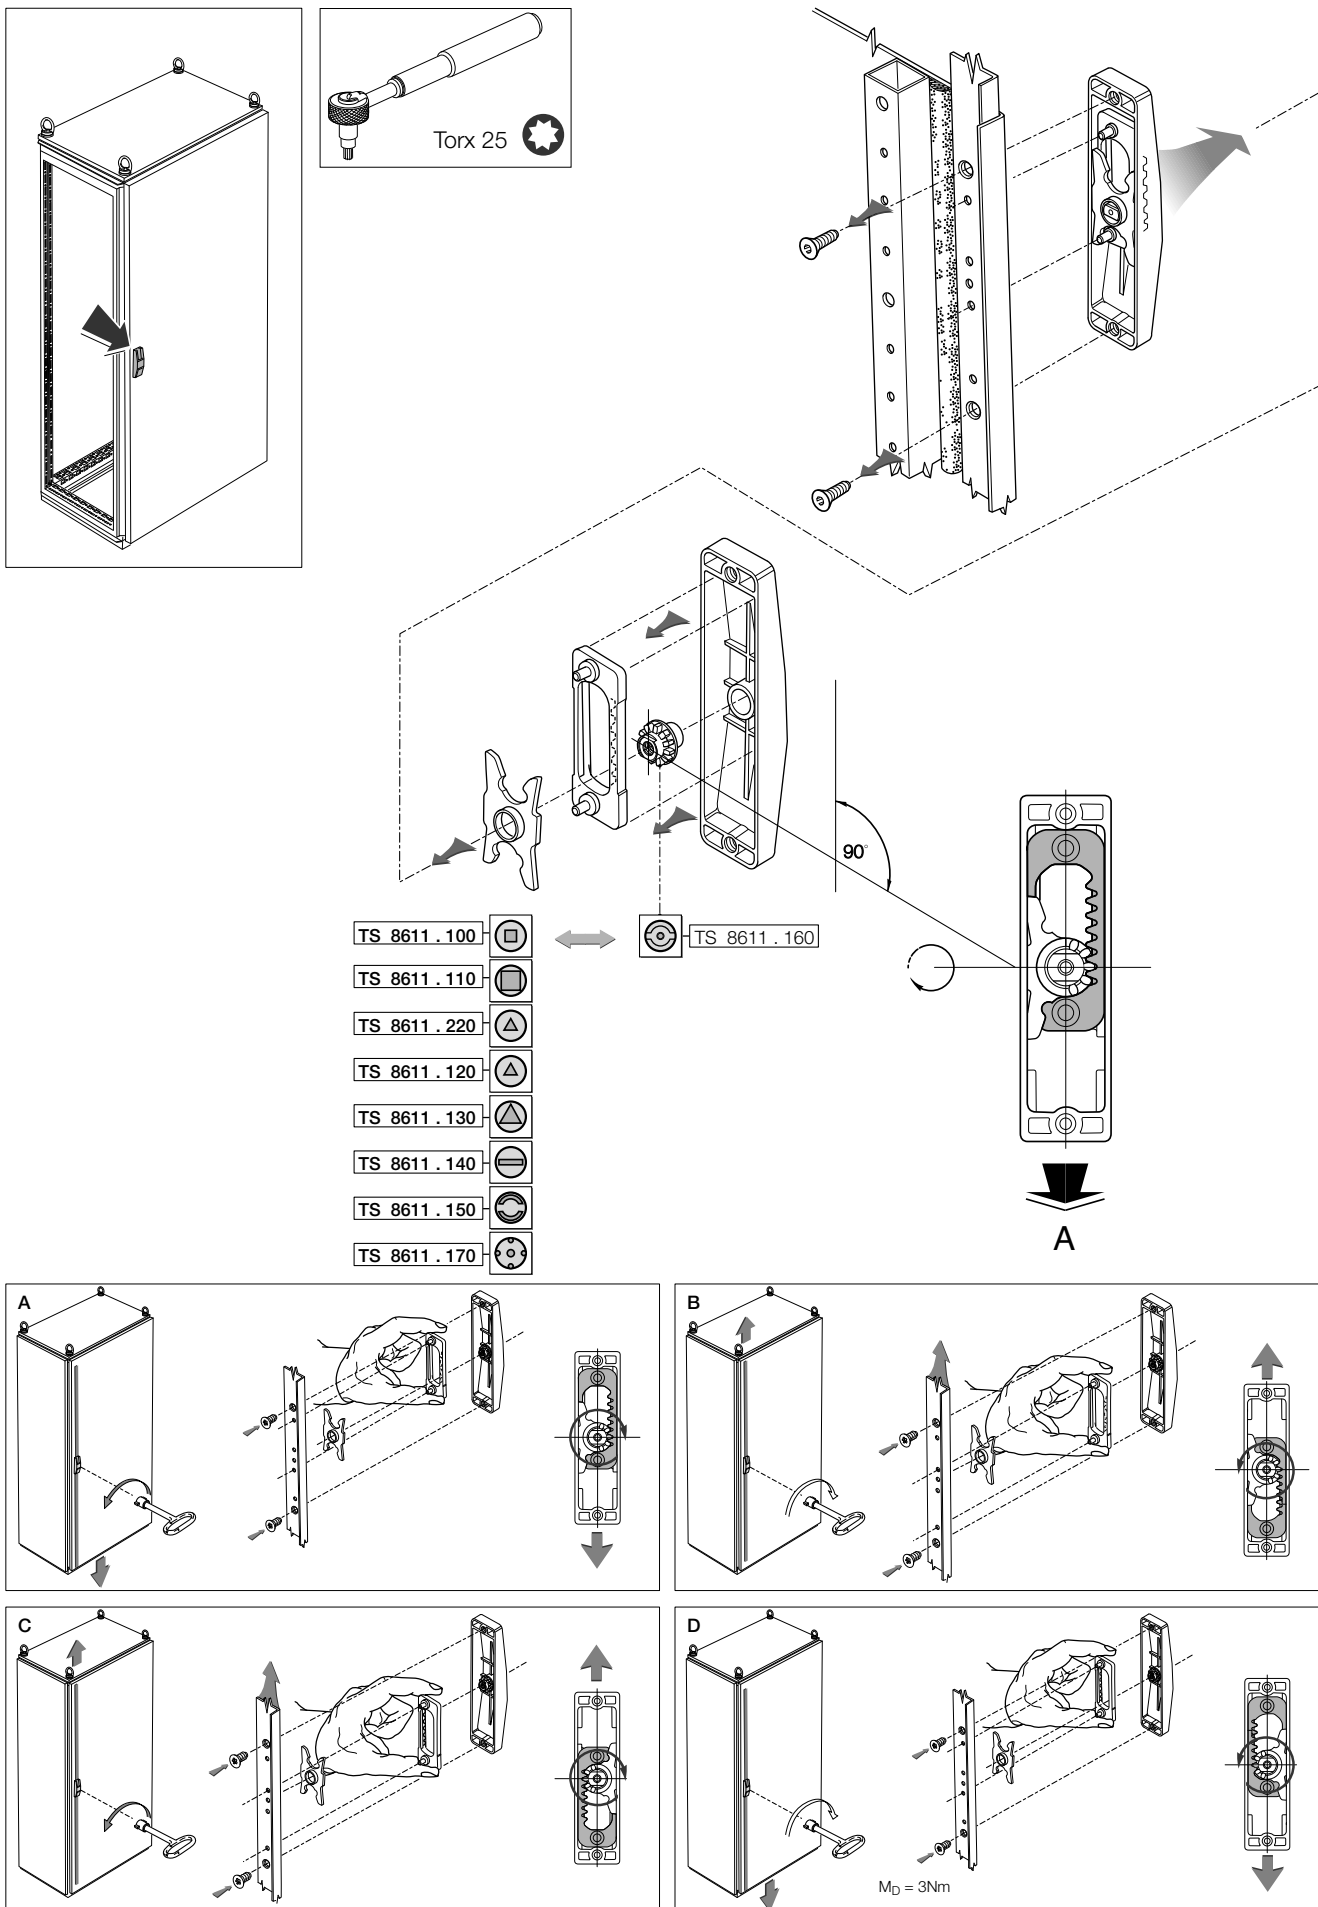


Verschlußsystem · Lock system

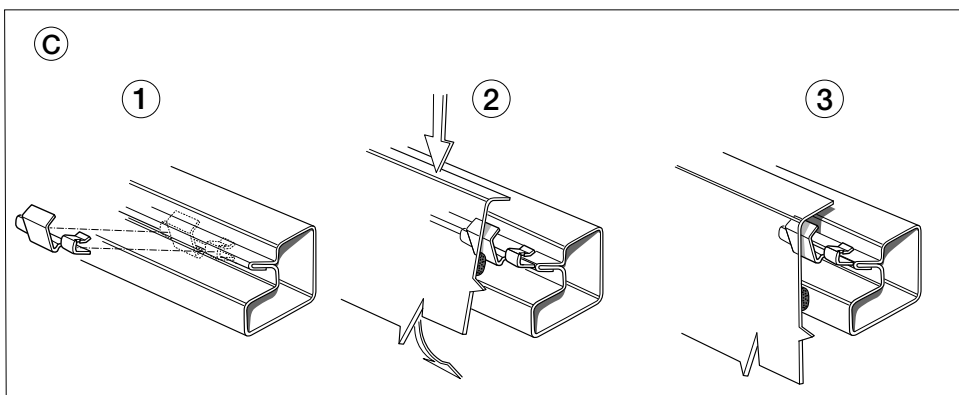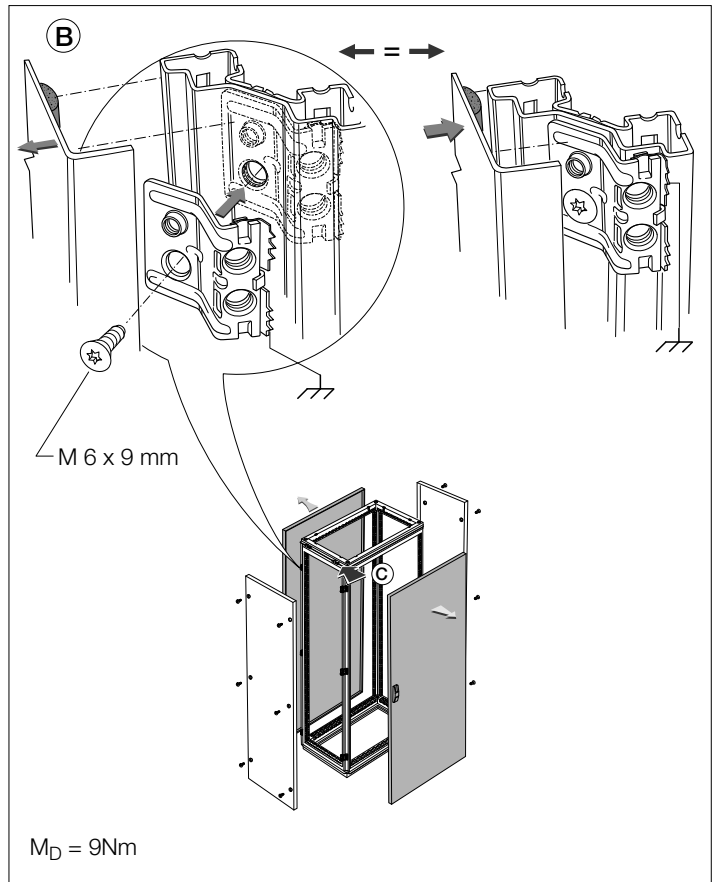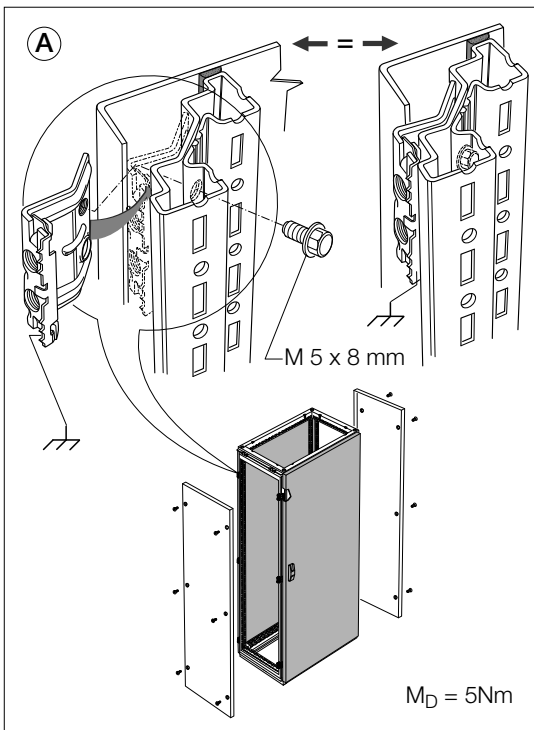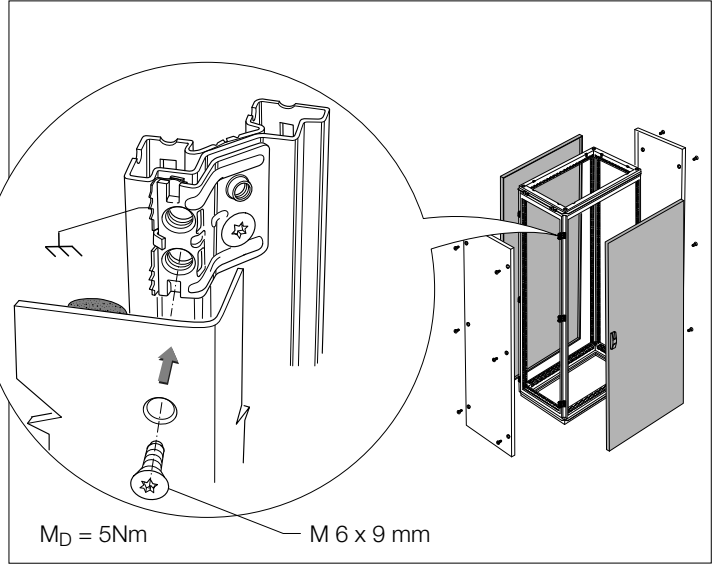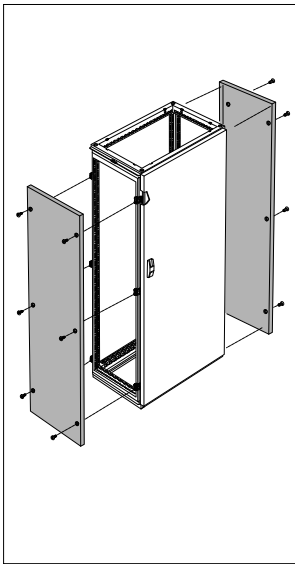


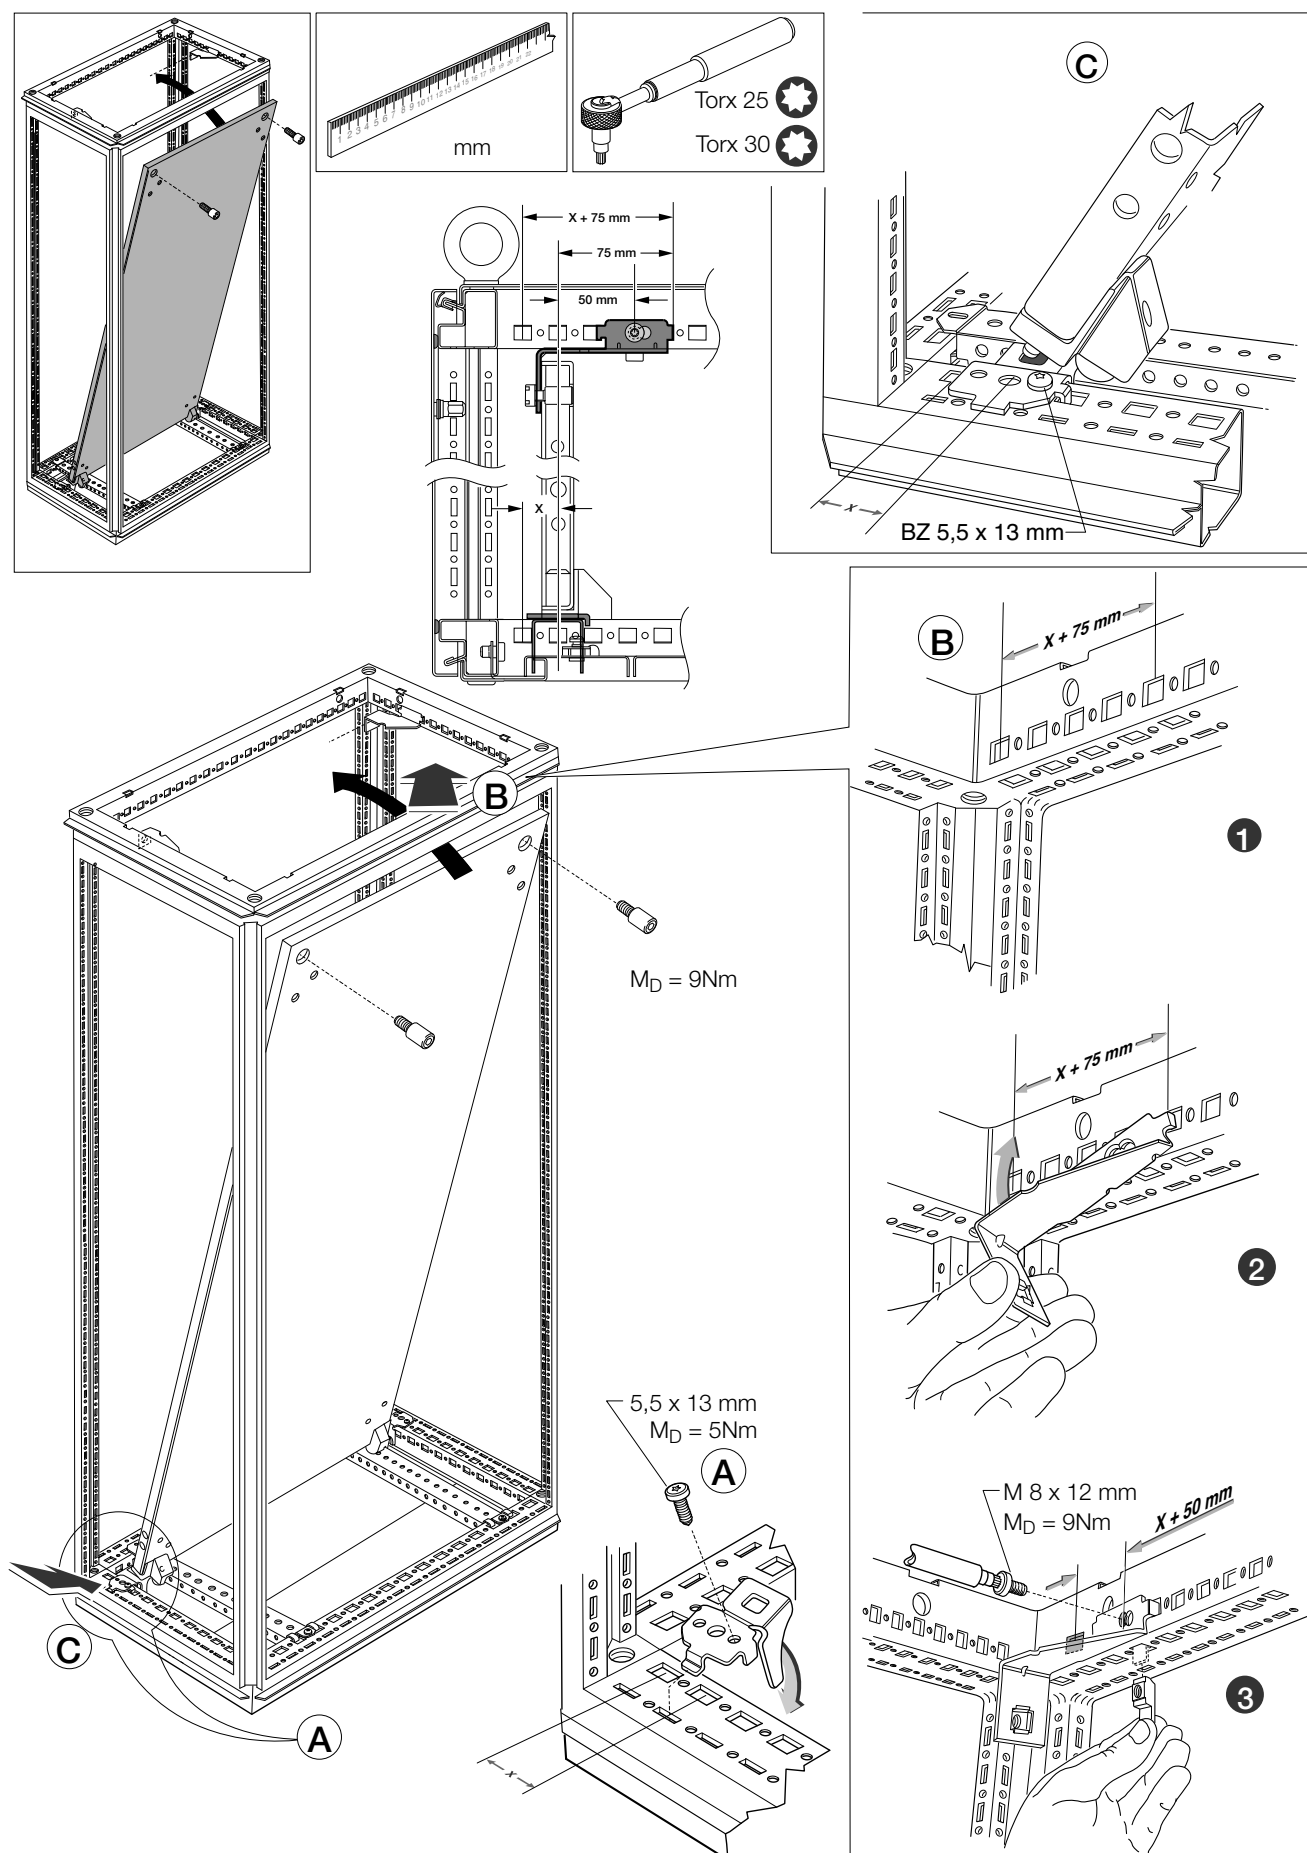

Montageplatte, versetzen · Mounting plate, relocate

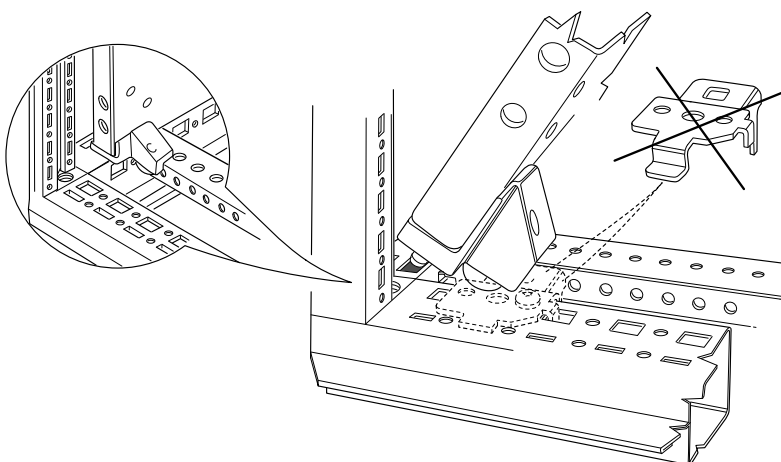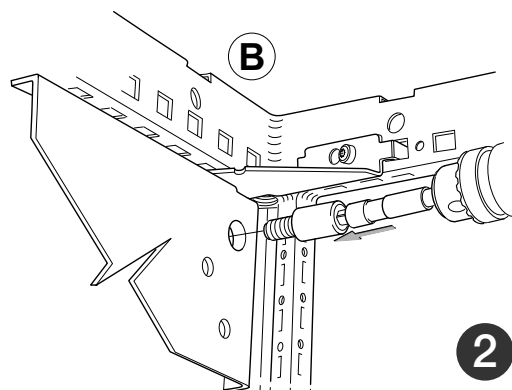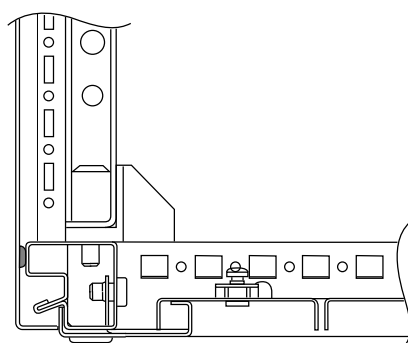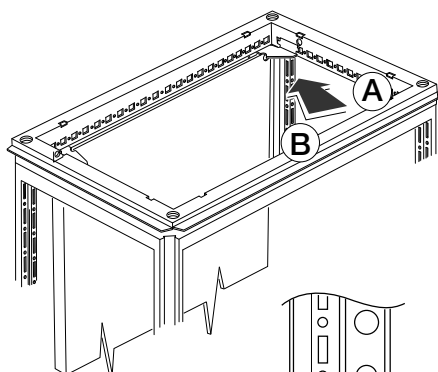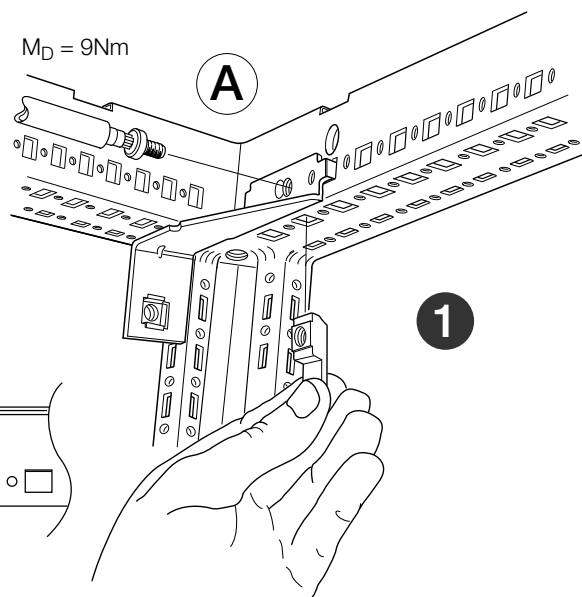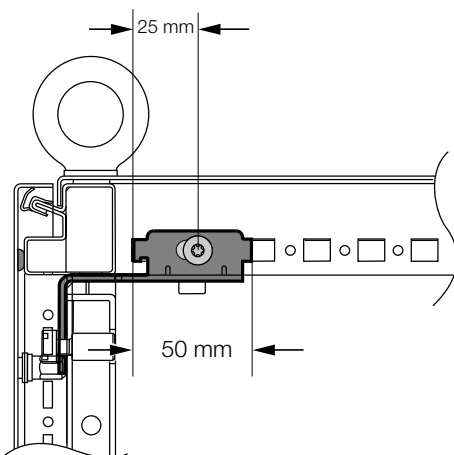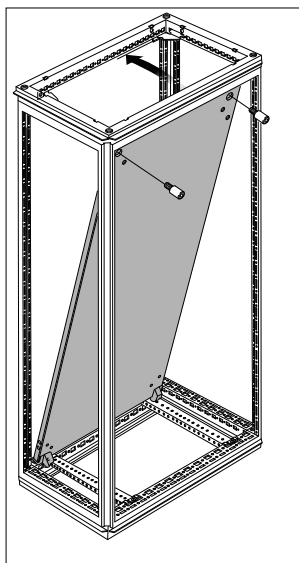


Montageplatte, hinterste Einbauposition  
Mounting plate, rearmost position




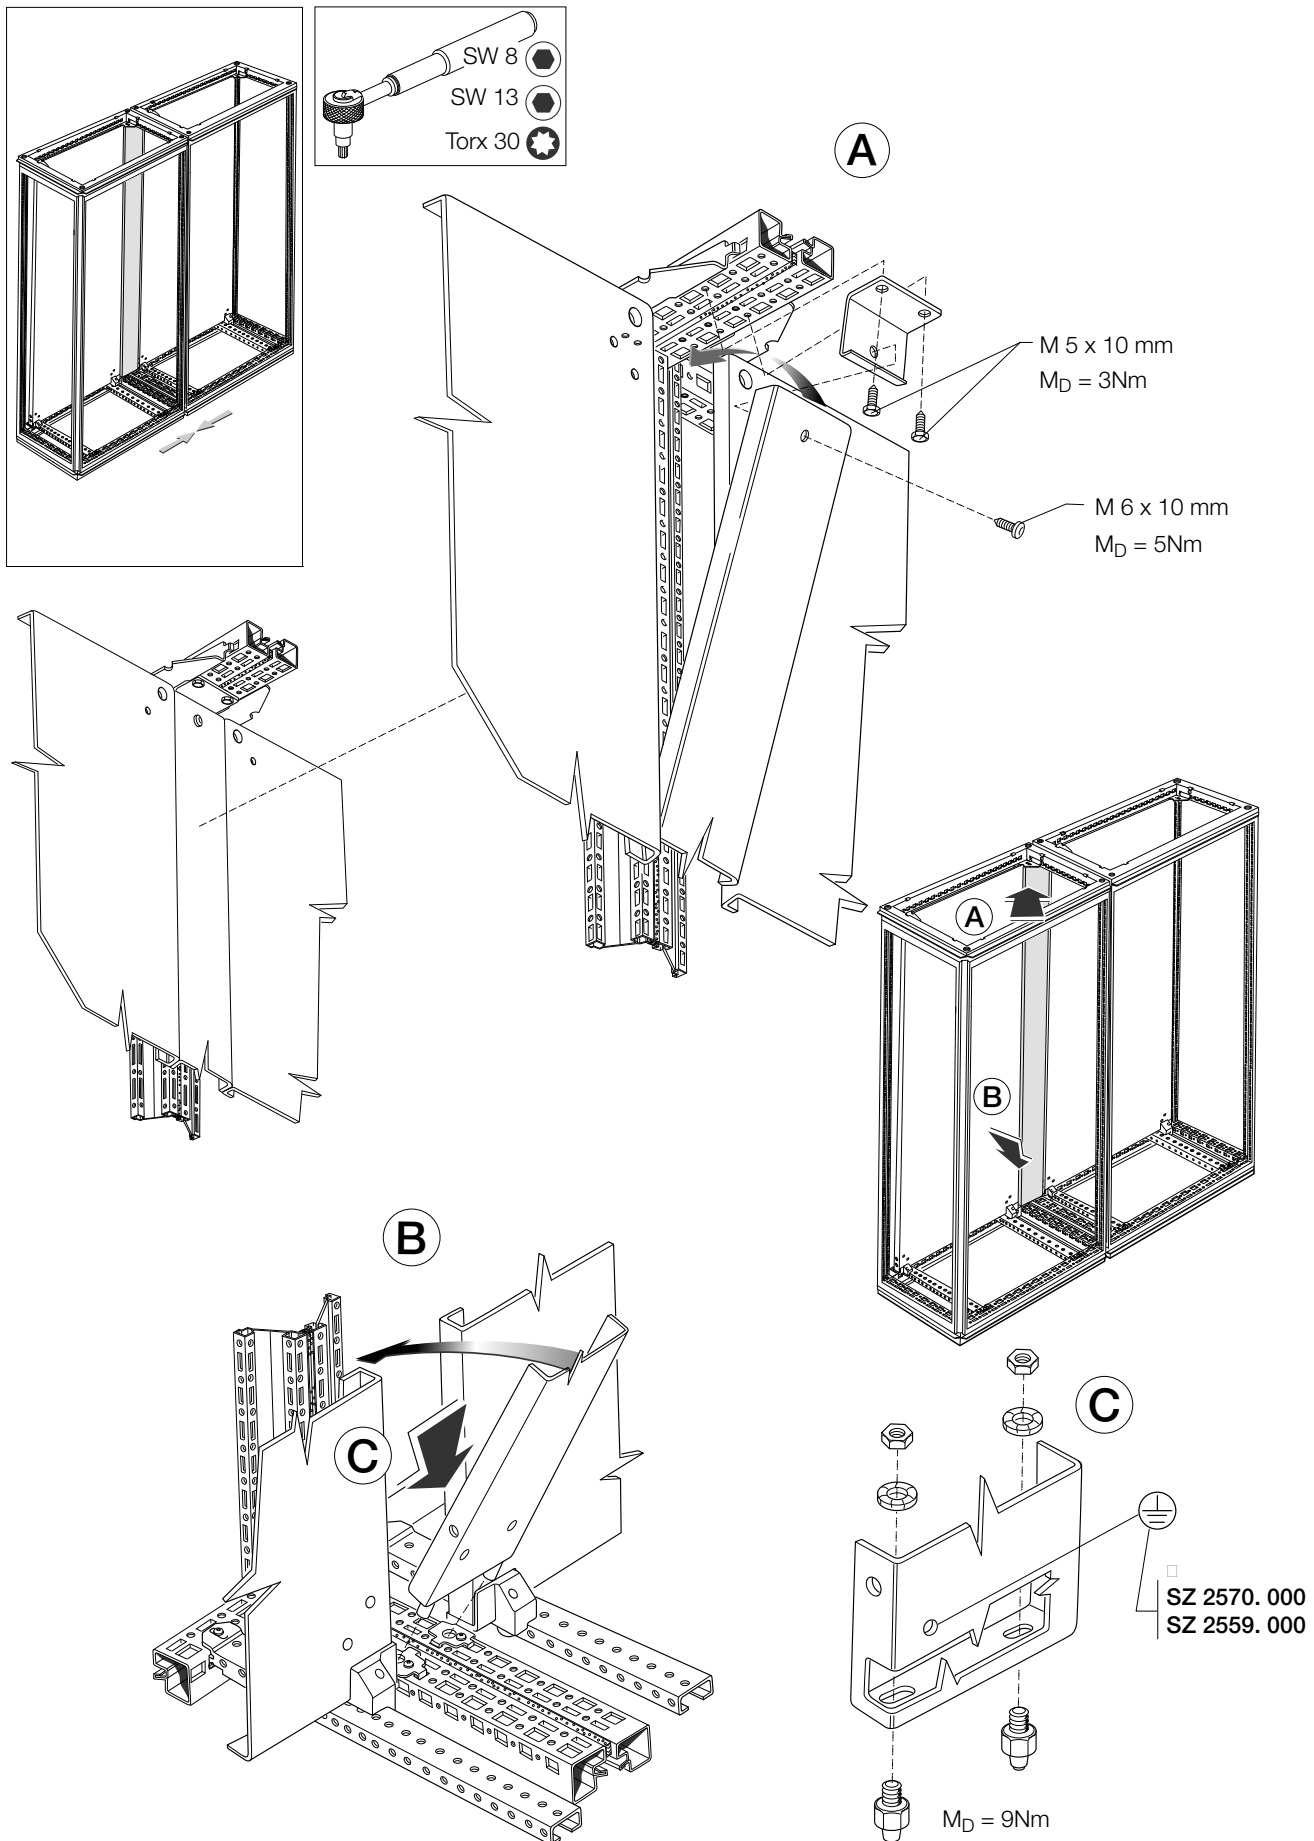



Montageplatten Zwischenstück · Mounting plate infill



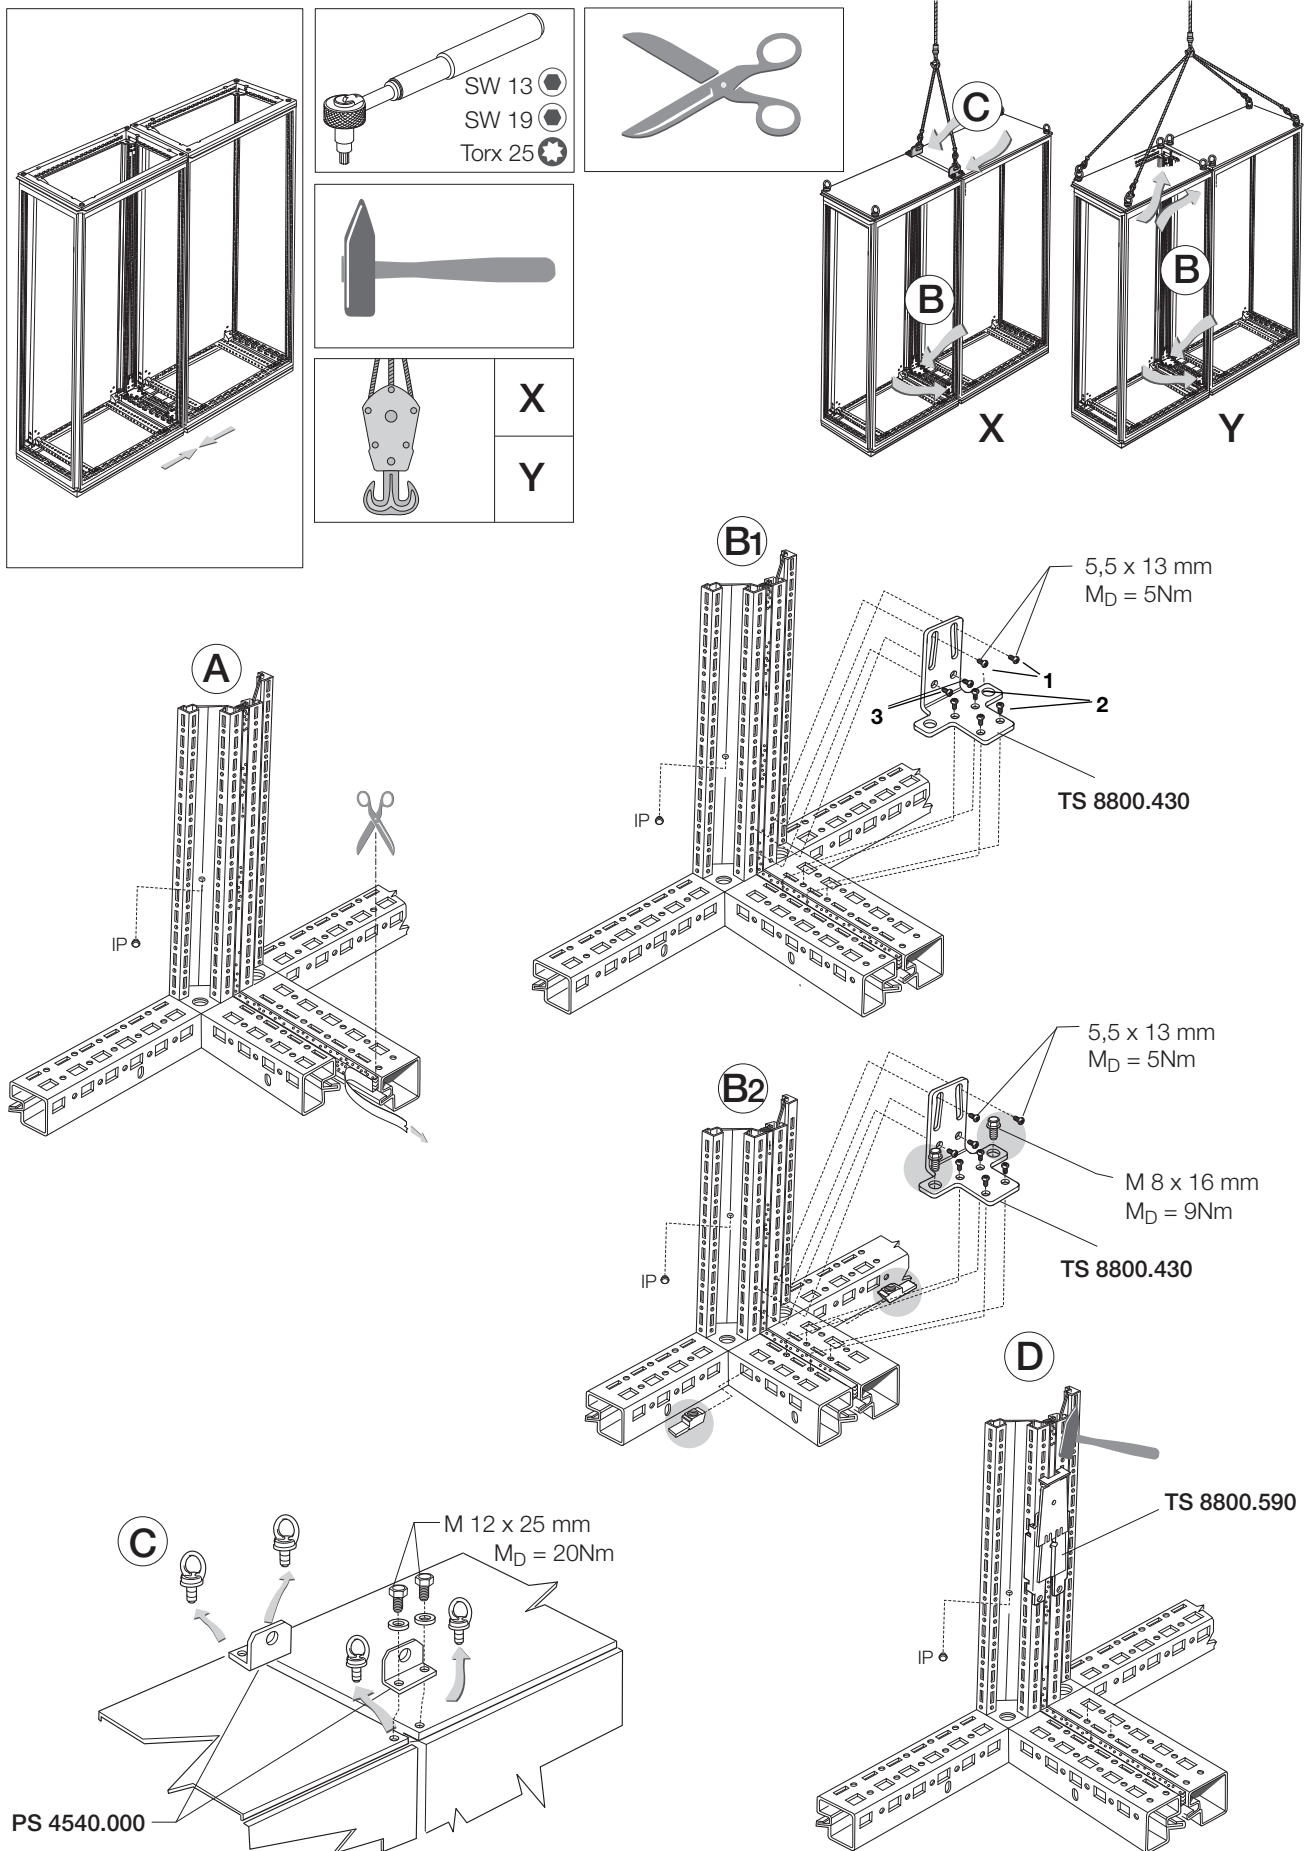



Anreihen – Bay

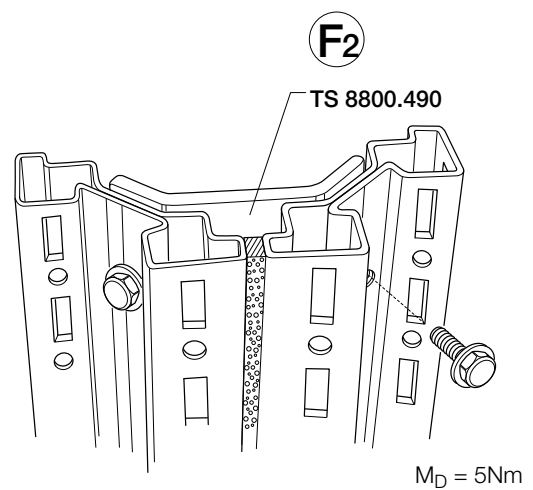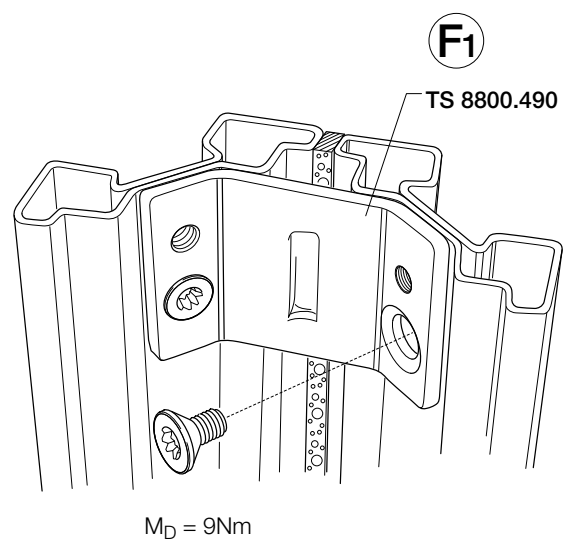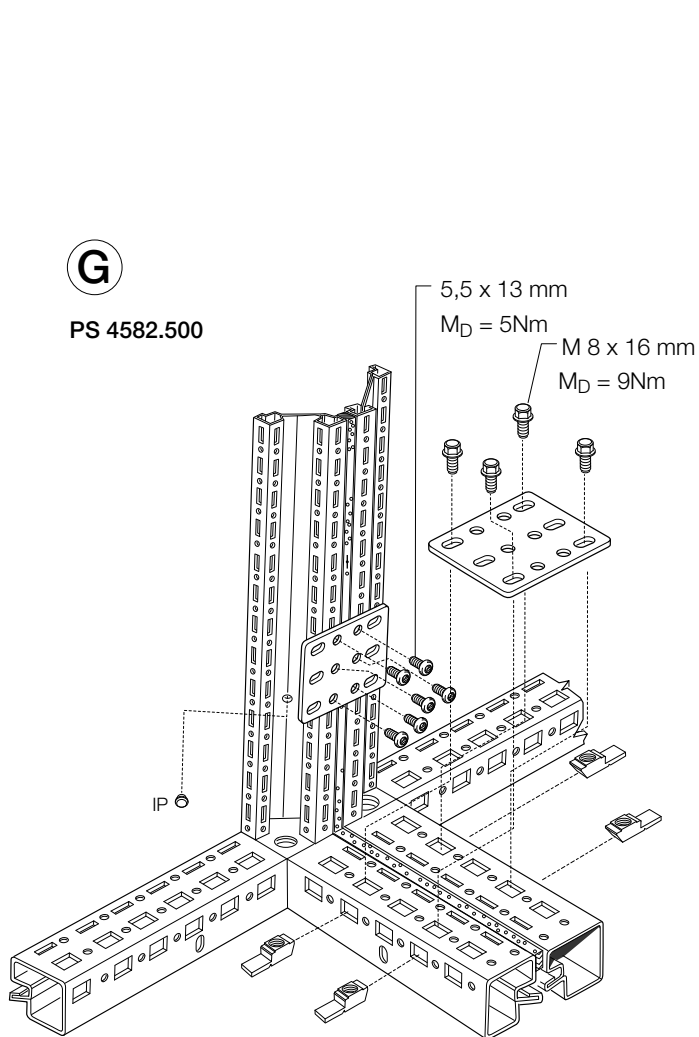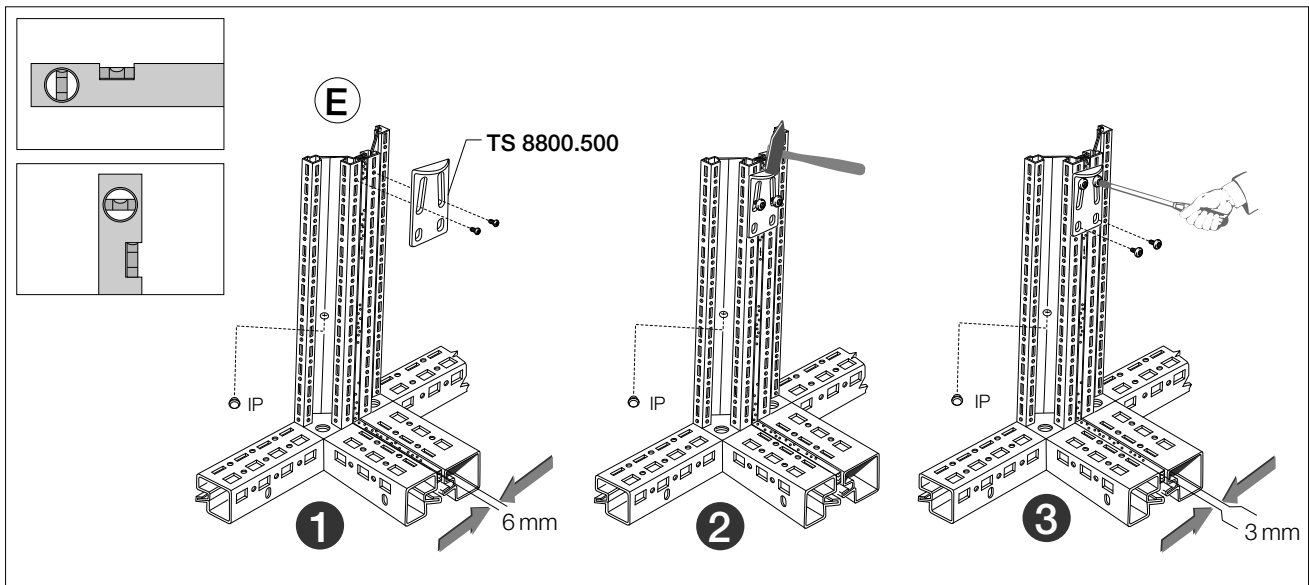

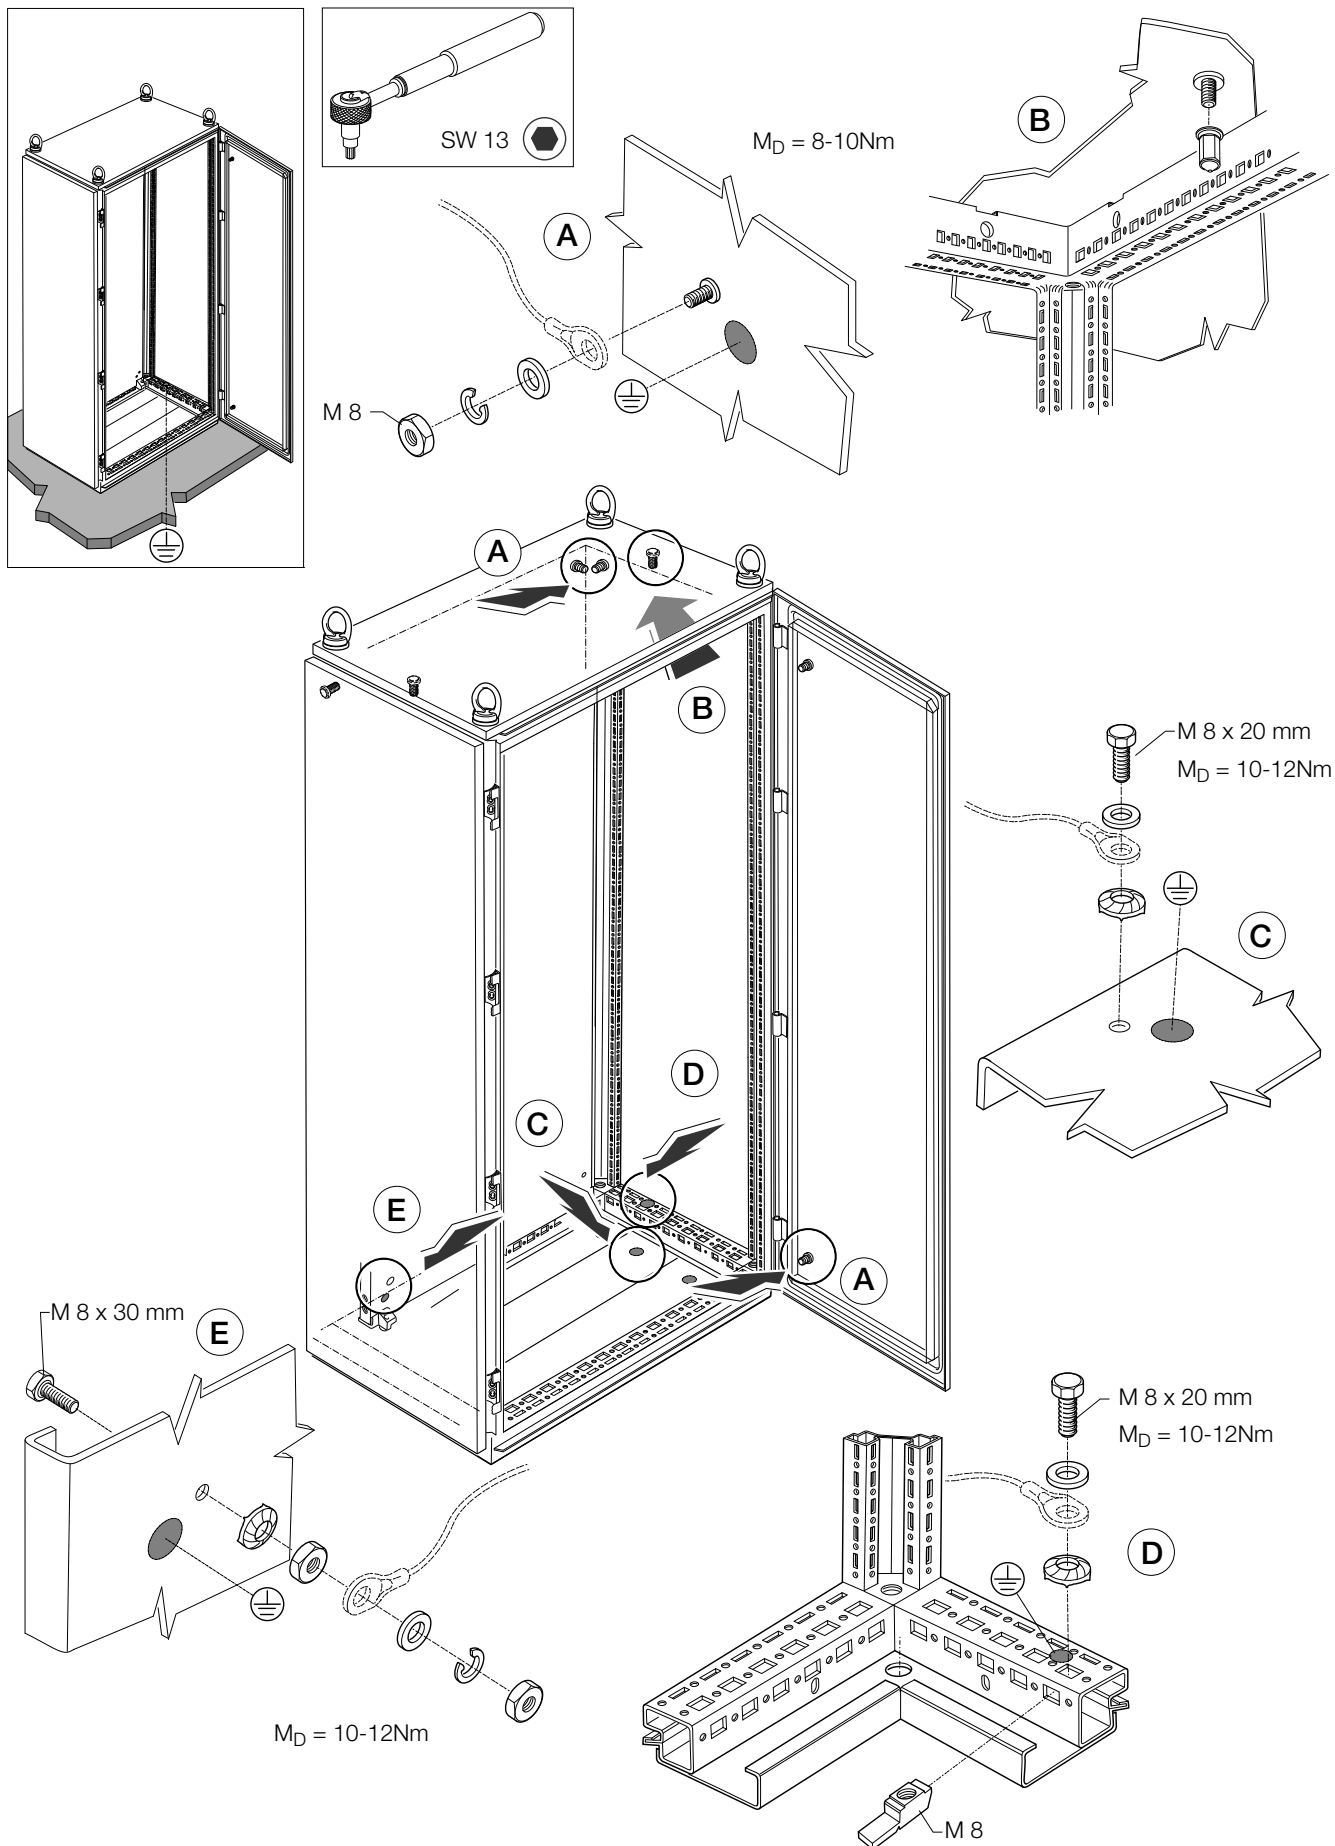

Erdungskonzept · Earthing concept

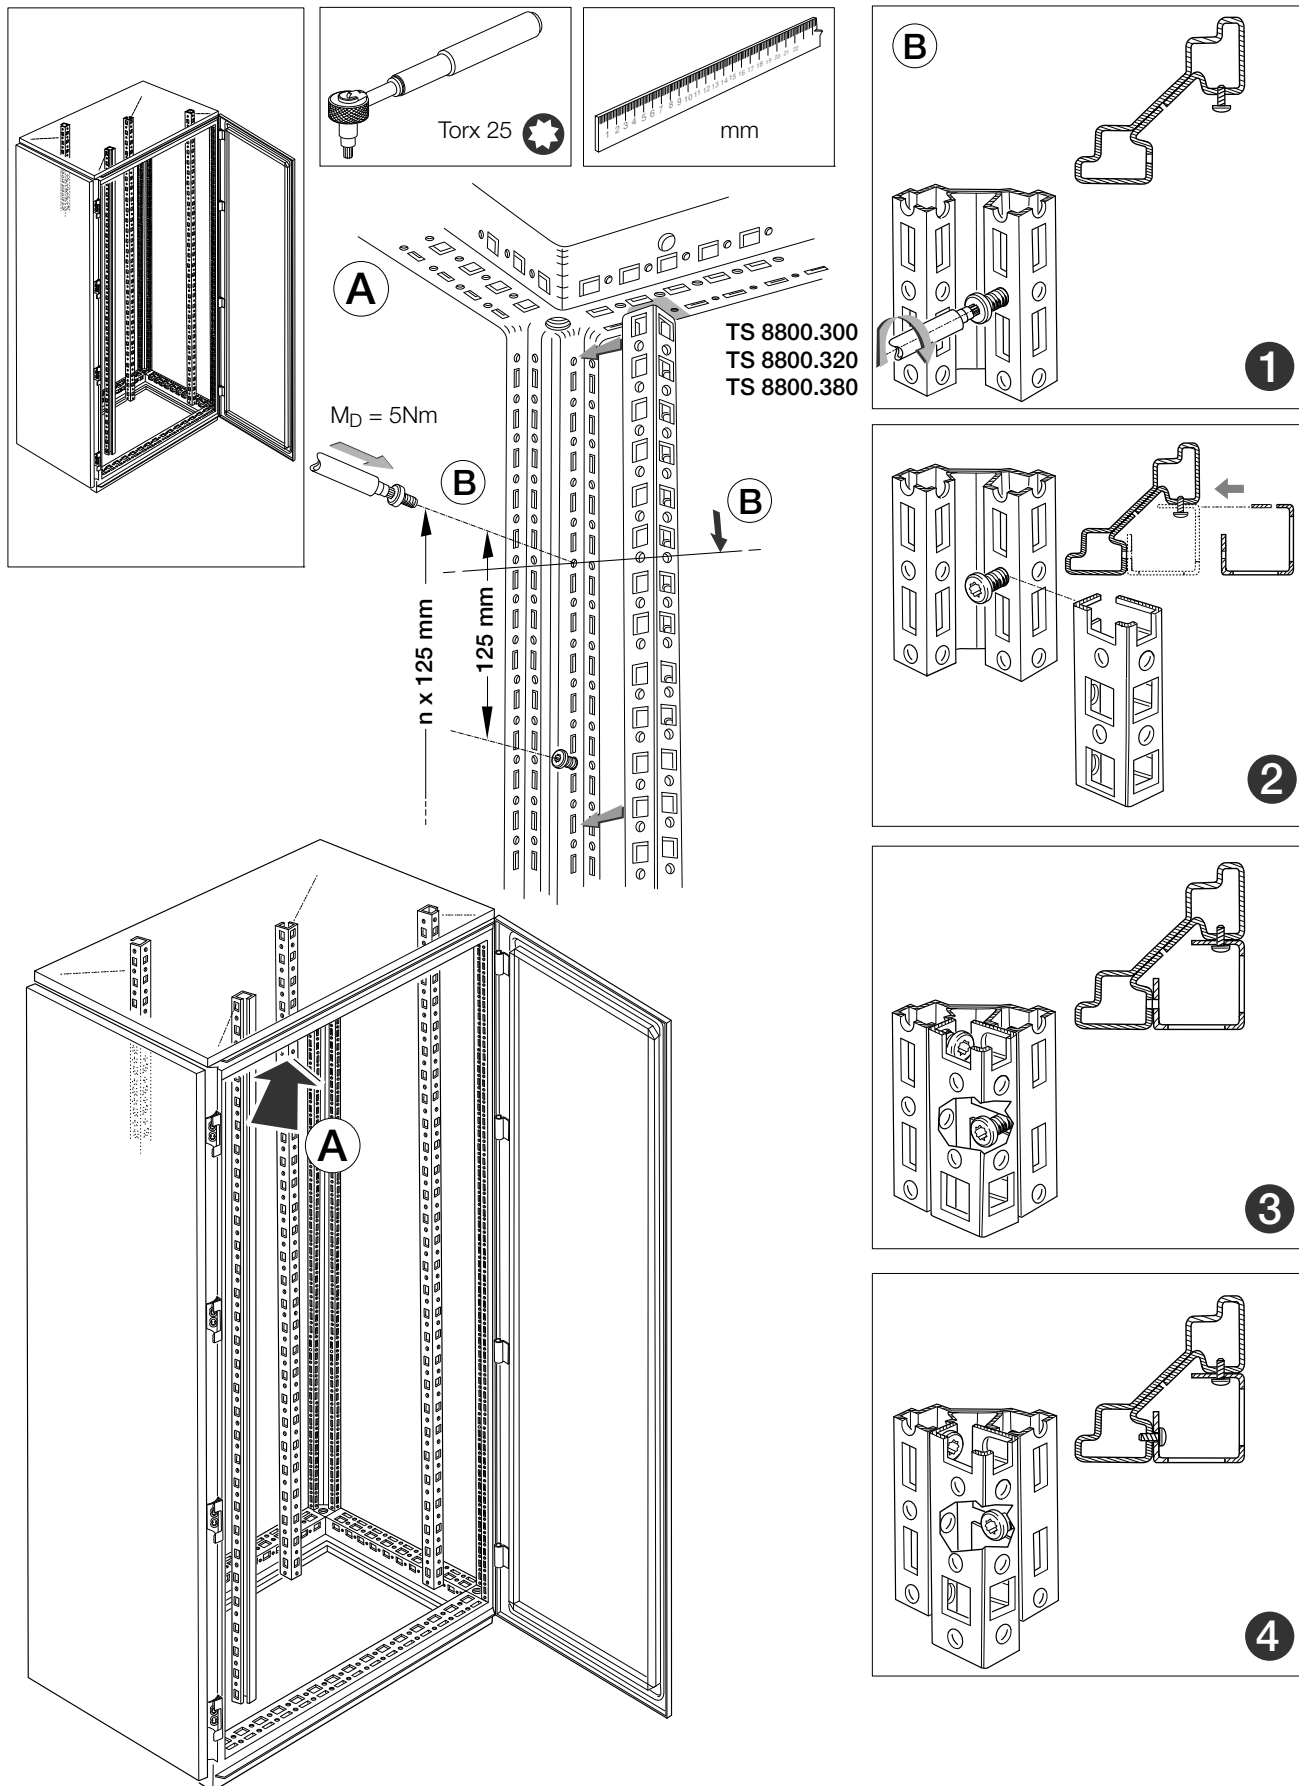


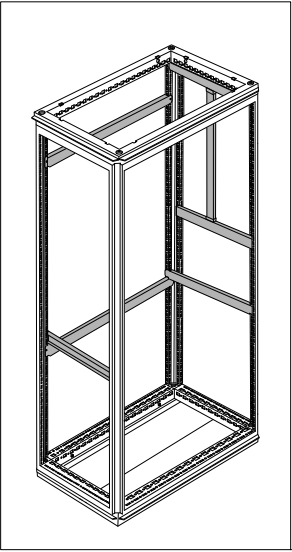

PS 4181.000

PS 4182.000

PS 4183.000

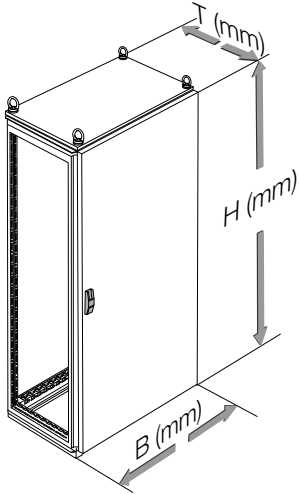

TS 8800.330  
PS 4183.000

PS 4181.000

PS 4183.000

PS 4182.000

PS 4199.000

1

2

3

4

5

6

6

8

8

9

8

3

13

12

11

10

| 1    | B / T | Best. Nr.: |
|------|-------|------------|
| 400  | TS    | 8612. 140  |
| 500  | TS    | 8612. 150  |
| 600  | TS    | 8612. 160  |
| 800  | TS    | 8612. 180  |
| 1000 | TS    | 8612. 100  |
| 1200 | TS    | 8612. 120  |

| 2   | B / T | Best. Nr.: |
|-----|-------|------------|
| 400 | PS    | 4694. 000  |
| 500 | PS    | 4695. 000  |
| 600 | PS    | 4696. 000  |
| 800 | PS    | 4697. 000  |

| 3   | B / T | Best. Nr.: |
|-----|-------|------------|
| 400 | TS    | 8612. 240  |
| 500 | TS    | 8612. 250  |
| 600 | TS    | 8612. 260  |
| 800 | TS    | 8612. 280  |

| 4    | B / T | Best. Nr.: |
|------|-------|------------|
| 400  | TS    | 8612. 040  |
| 500  | TS    | 8612. 050  |
| 600  | TS    | 8612. 060  |
| 800  | TS    | 8612. 080  |
| 1000 | TS    | 8612. 000  |
| 1200 | TS    | 8612. 020  |

| 5   | B / T | Best. Nr.: |
|-----|-------|------------|
| 400 | PS    | 4309. 000  |
| 500 | PS    | 4596. 000  |
| 600 | TS    | 8800. 130  |
| 800 | PS    | 4579. 000  |

| 6    | B/H/T | Best. Nr.: |
|------|-------|------------|
| 400  | PS    | 4374. 000  |
| 500  | PS    | 4375. 000  |
| 600  | PS    | 4376. 000  |
| 800  | PS    | 4377. 000  |
| 1000 | PS    | 4382. 000  |
| 1200 | PS    | 4378. 000  |
| 1800 | PS    | 4379. 000  |
| 2000 | PS    | 4380. 000  |
| 2200 | PS    | 4381. 000  |

| 7    | H  | Best. Nr.: |
|------|----|------------|
| 1800 | TS | 8800. 380  |
| 2000 | TS | 8800. 300  |
| 2200 | TS | 8800. 320  |

| 8    | B/H/T | Best. Nr.: |
|------|-------|------------|
| 400  | PS    | 4169. 000  |
| 500  | PS    | 4170. 000  |
| 600  | PS    | 4171. 000  |
| 800  | PS    | 4172. 000  |
| 1000 | PS    | 4173. 000  |
| 1200 | PS    | 4174. 000  |
| 1800 | PS    | 4176. 000  |
| 2000 | PS    | 4177. 000  |
| 2200 | PS    | 4178. 000  |




| 9    | B / T | Best. Nr.: |
|------|-------|------------|
| 600  | PS    | 4364. 000  |
| 800  | PS    | 4365. 000  |
| 1000 | PS    | 4373. 000  |
| 1200 | PS    | 4367. 000  |

| 10   | B / T | Best. Nr.: |
|------|-------|------------|
| 400  | PS    | 4193. 000  |
| 600  | PS    | 4191. 000  |
| 800  | PS    | 4192. 000  |
| 1000 | PS    | 4336. 000  |
| 1200 | PS    | 4196. 000  |



| 11   | B / T | Best. Nr.: |
|------|-------|------------|
| 500  | PS    | 4943. 000  |
| 600  | PS    | 4944. 000  |
| 800  | PS    | 4945. 000  |
| 1000 | PS    | 4946. 000  |
| 1200 | PS    | 4947. 000  |

| 12   | B / T | Best. Nr.: |
|------|-------|------------|
| 600  | PS    | 4361. 000  |
| 800  | PS    | 4362. 000  |
| 1000 | PS    | 4347. 000  |
| 1200 | PS    | 4363. 000  |

| 13  | B / T | Best. Nr.: |
|-----|-------|------------|
| 400 | PS    | 4394. 000  |
| 500 | PS    | 4395. 000  |
| 600 | PS    | 4396. 000  |
| 800 | PS    | 4398. 000  |

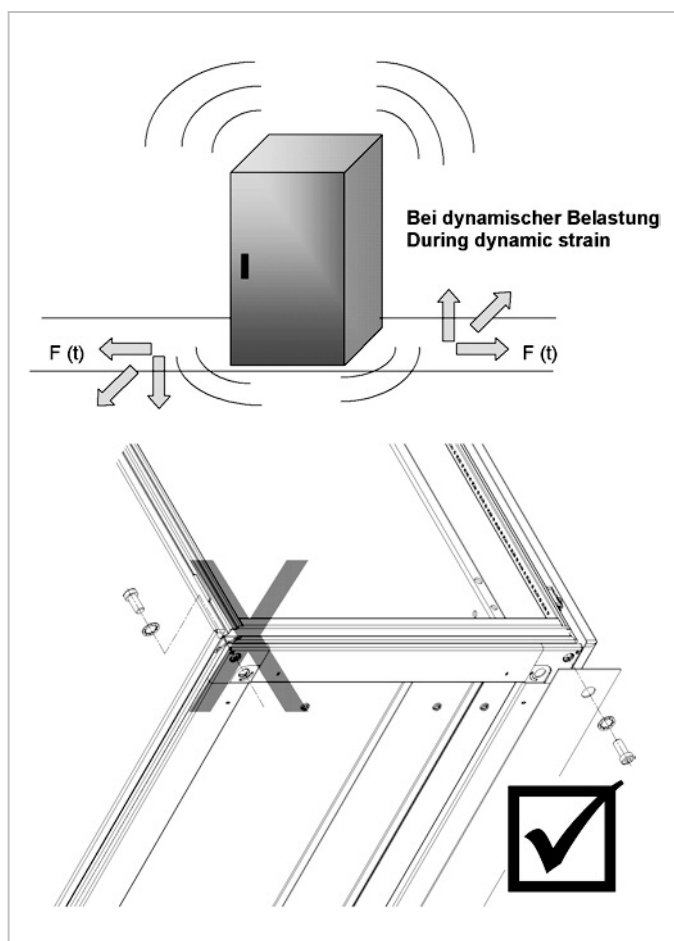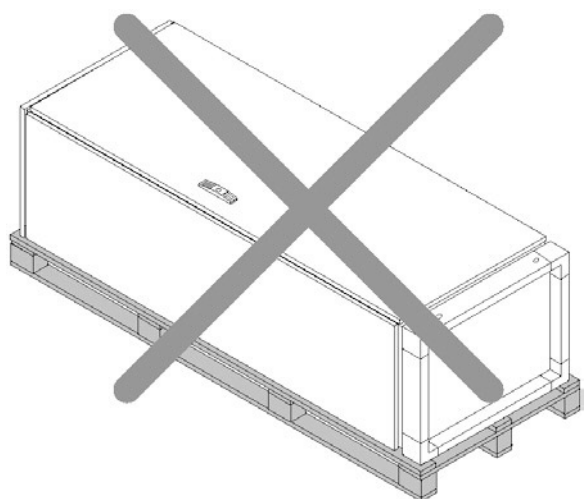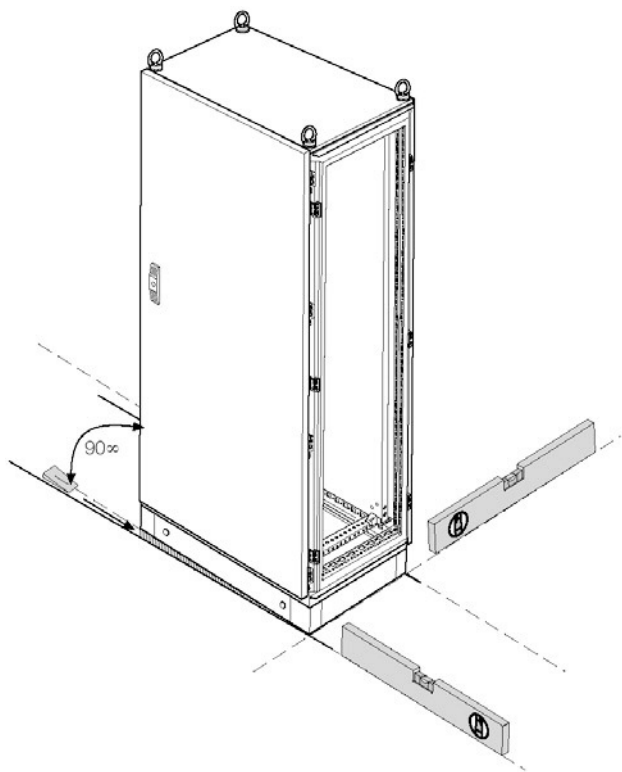


Transport - Transport

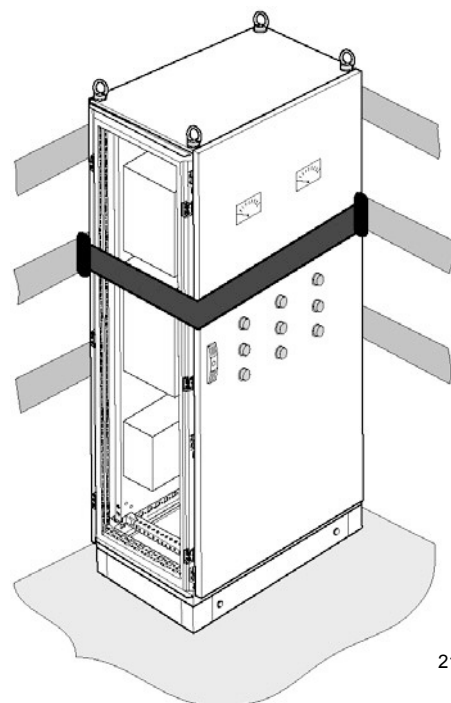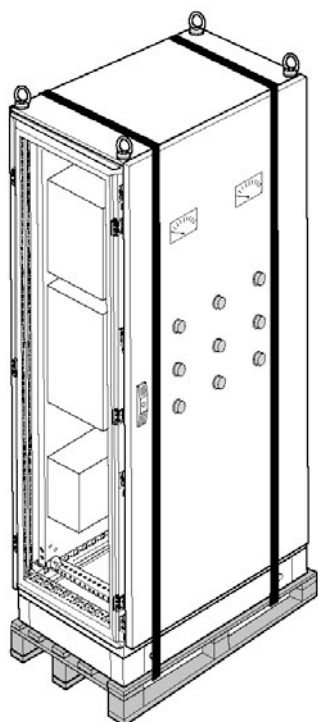




Schaltschrank-Systeme  
Industrial enclosures  
Coffrets et armoires électriques  
Kastsystemen  
Apparatskåpssystem  
Armadi per quadri di comando  
Sistemas de armarios  
インダストリアル エンクロージャー



Stromverteilung  
Power distribution  
Distribution de courant  
Stroomverdelingscomponenten  
Strömfördelning  
Distribuzione di corrente  
Distribución de corriente  
分電・配電システム



Elektronik-Aufbau-Systeme  
Electronic packaging  
Electronique  
Electronic Packaging Systems  
Electronic Packaging  
Contenitori per elettronica  
Sistemas de montaje para la electronica  
エレクトロニクス パッケージシステム



System-Klimatisierung  
System climate control  
Climatisation  
Systeemklimatisering  
Systemklimatisering  
Soluzioni di climatizzazione  
Climatización de sistemas  
温度管理システム




IT-Solutions  
IT solutions  
Solutions IT  
Informatie en Communicatie Technologie  
IT-lösningar  
Soluzioni per IT  
Soluciones TI  
ITソリューション



Communication Systems  
Communication systems  
Armoires outdoor  
Outdoor-behuizingen  
Communication Systems  
Soluzioni outdoor  
Sistemas de comunicación  
コミュニケーションシステム

Rittal GmbH & Co. KG · Postfach 1662 · D-35726 Herborn  
 Telefon (02772) 505-0 · Telefax (02772) 505-23 19 · eMail: Info@rittal.de · www.rittal.de



**Switch to perfection**

**Umschalten auf Perfektion**

**RITTAL**